



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04M 3/22, 3/50, 7/14</b>		<b>A1</b>	(11) International Publication Number: <b>WO 98/05152</b>
			(43) International Publication Date: <b>5 February 1998 (05.02.98)</b>
(21) International Application Number: <b>PCT/US97/13454</b>		(81) Designated States: <b>AU, BR, CA, CN, IL, JP, KR, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</b>	
(22) International Filing Date: <b>25 July 1997 (25.07.97)</b>			
(30) Priority Data: <b>08/686,942      26 July 1996 (26.07.96)      US</b>		<b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71)(72) Applicants and Inventors: <b>GLASER, Lawrence, F. [US/US]; 10705 Averett Drive, Fairfax Station, VA 22152 (US). STOWERS, Brian, E. [US/US]; 8315 Botsford Court, Springfield, VA 22152 (US).</b>			
(74) Agent: <b>ROBINSON, Eric, J.; Sixbey, Friedman, Leedom &amp; Ferguson, P.C., Suite 600, 2010 Corporate Ridge, McLean, VA 22102 (US).</b>			

(54) Title: TELECOMMUNICATIONS INSTALLATION AND MANAGEMENT SYSTEM AND METHOD

## (57) Abstract

A telecommunications system installation and management system (10) and method for managing, controlling, updating and monitoring telecommunications devices, such as a private branch telephone switch (22, 23), voice messaging system (26), call accounting system (24), central office telephone switch, router, bridge, hub, or associated peripheral equipment. The device is capable of managing and controlling a plurality of different types of telecommunications equipment provided by various different manufacturers to thereby seamlessly integrate the equipment into an easily managed telecommunications system. A local database within the telecommunications system provides for real-time or near real-time access and modification of programming information for the telecommunications equipment and further provides for redundancy in the event of equipment failure. A single point of control for system management and data entry is provided in an integrated application that reduces the amount of necessary data to be entered and that facilitates user modifications to operating parameters. The system preferably actively maintains a live connection with each of the managed devices.

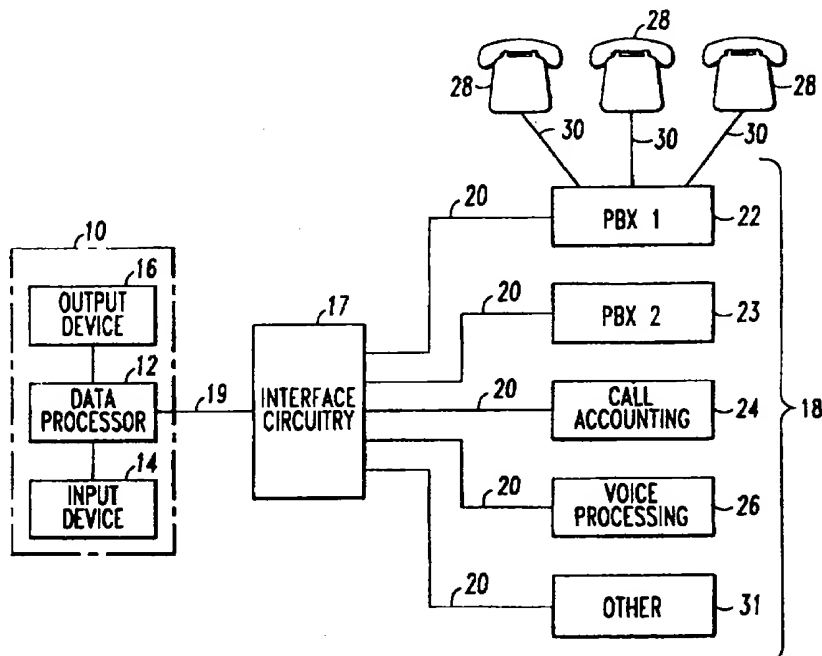

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## TELECOMMUNICATIONS INSTALLATION AND MANAGEMENT SYSTEM AND METHOD

### Field of the Invention

5 The present invention generally relates to a system and method of managing and controlling electronic equipment having a plurality of programmable parameters and more particularly relates to a system and method for managing, controlling, updating and monitoring one or more telecommunications switches, such as private branch exchange telephone switches, central offices and their associated peripheral telecommunications equipment.

---

### Background of the Present Invention

10 The ability to quickly, easily and efficiently communicate has always been a critical component, if not a necessity, for successful business operations. Today, as the global economy continues to expand, the ability to communicate is even more important. In partial response to these demands, sophisticated telecommunications equipment has been developed that permits users to quickly and easily place, receive, transfer and switch telephone calls as well  
15 as provide advanced features such as call accounting and voice messaging functionality. As these features have become widely available in local telecommunications equipment, such as private branch exchange (PBX) telephone switches, central offices, key and hybrid telephone systems (small telecommunications switches), call accounting systems, voice messaging systems, computer telephony interface (CTI) devices, automatic call distribution (ACD) devices,  
20 internet servers, etc., the demand for and installation of these systems has continued to expand. Often, a vast number of sites have layered or "integrated" two or more of the aforementioned devices and rarely are these different devices using the same operating system or of the same brand. More often, these differing devices include a mixture of operating systems and brands.

Such a mix of advanced telecommunications equipment, however, still typically relies  
25 upon a significant amount of manual human interaction to install, setup, operate, modify and maintain. Specifically, when a new telephone switch such as a PBX is to be installed at a facility, not only must the physical equipment itself be installed, but the equipment must be configured and programmed to operate as desired by the users of the facility. In fact, as more and more advanced features have become available in the equipment, the burden on the  
30 equipment installer to initially setup and configure these features for the specific needs of the

end user and the burden on the technician in maintaining and modifying the equipment, the associated cable records for the equipment, and cable and service activities, has also increased.

When a telephone switch is accompanied by other telecommunications equipment, such as voice messaging systems, call accounting systems, CTI devices, wireless communication  
5 servers, or ACD devices, installation inconveniences are still further multiplied. Specifically, many of these ancillary pieces of equipment require additional entry of user information that is duplicative of information already entered into the main telephone switching equipment. In such case, not only must a technician program the main telecommunications switch, but additional time (and money) must be spent for programming ancillary equipment with similar  
10 information. Typically, these systems must be perfectly synchronized with each other or problems will occur. As a result, the total cost of the installation is greatly increased and data entry error rates are greatly increased.

To further complicate the installation and management of this equipment, each discrete change to one component of a telecommunications system often requires additional, similar  
15 changes to several other components. Furthermore, these additional changes typically must be done in a specific order and, since the operating system design of each of the telecommunications devices often changes from manufacturer to manufacturer and from device to device, by using an entirely different command structure for each different component. Therefore, when done manually, a technician must remember different command structures for  
20 each of the devices that require programming and also must remember the order in which the changes should be made and further may require different terminals, passwords, procedures, software, etc. Thus, a highly skilled technician having familiarity with all of the various types of equipment that make up the telecommunications system must perform these changes, or as is more common, multiple technicians are required. Clearly, with even a limited number of  
25 devices that require installation, maintenance, or programming, the likelihood of an error is greatly increased.

Since modern telecommunications equipment provides substantial flexibility in programming to accommodate varying preferences of different users, it is often necessary to begin the installation of such equipment by surveying users as to their desires and preferences  
30 so that these can be accurately reflected through programming of the equipment. This is typically done by distributing a questionnaire to each user to receive information sufficient to allow the equipment to be properly configured. Thus, not only is there a substantial time commitment needed to review and enter the information received on such questionnaires into

the equipment, but significant effort on the part of each and every user is also required to complete the questionnaires. Typically, collection of this data and entry of it must wait until the system is installed, while in the present invention described below, this information can be stored externally, checked for omissions, checked for errors or duplications and processed  
5 months in advance.

Such disadvantages are particularly highlighted when an outdated PBX or central office system is replaced with an improved system. In such case each user is typically surveyed as to their preferences, as above, and this information is manually re-entered after installation of the improved PBX or central office system. Thus, since equipment upgrades impact each and  
10 every user in a facility, a significant devotion of resources is required. As a result, the benefits of advanced features provided by improved telecommunications equipment often does not outweigh the installation costs and thus many organizations either do not upgrade their equipment, or delay such upgrades as long as possible.

↓  
~~Large organizations are also often confronted with the need to augment existing PBX~~  
15 systems with newer versions of the same brand of equipment or equipment manufactured by a different manufacturer. Such organizations are then confronted with a host of difficult installation, operation, coordination and maintenance problems associated with managing disparate systems having different capabilities, operating characteristics and command protocols.

Furthermore, post-installation maintenance of such telecommunications switching  
20 equipment often requires intervention of a skilled technician. For example, adding new users to the system requires that information sufficient to identify the user, her equipment and her preferences be programmed into the system. Often, this programming must be performed by a technician, who must make a service call to the facility to complete such programming. Also, management of detailed records documenting the telecommunications system setup must be  
25 manually kept for each device. That is, cable numbers, user identification and preferences, equipment types and locations, etc. must all be maintained separately from the system itself. Again, as a result, the costs involved in maintaining the telecommunications system is greatly increased.

Typically, programming of a telecommunications switch such as a PBX is performed  
30 by entering a series of special codes into a designated telephone handset connected to the PBX. Thus, by using the keypad and any display capabilities of the telephone, programming information can be entered into the PBX system. While such a system has the advantage of not requiring additional support equipment, such an interface is not user friendly and thus is

extremely difficult for untrained personnel to use. In addition, even a skilled technician is limited in that each item to be programmed must be repetitively entered for each user on the system. Thus, for each station connected to the system, the technician must enter a complex series of digits that identify a parameter to be set and the appropriate data for that parameter.

5 For systems having hundreds or thousands of stations, this process is not only extremely time consuming but is also prone to significant data entry errors.

While several attempts have been made to overcome one or more of the above deficiencies, none have succeeded in providing a telecommunications installation and management system that substantially reduces the amount of manual human interaction required to install and maintain telecommunications equipment. For example, a number of manufacturers have developed so called "dumb" terminals that interface with a PBX telephone switch to facilitate programming thereof. These dumb terminals (or a PC emulating a dumb terminal) generally do not contain any processing capability, but rather act to display data stored within a memory in the PBX switch and to receive and forward user input to the switch. Thus, 10 for example, the current operating parameters for a given telephone station can be requested from the switch, displayed on the terminal and modifications received from a user can be returned and stored in the telephone switch memory. In fact, to a technician skilled in programming a switch, the enhanced personal computer interface of TTY interface is no more efficient than a dumb terminal or programming via a telephone station. The present invention, 15 however, overcomes these deficiencies.

Implementations of such systems, however, typically respond slowly to user requests for data due to the relatively slow speed of data communication between the terminal and the switch, internal latency of the switch and upon encountering a busy condition. Thus, when information for a given telephone station is requested, that information must be accessed by the telephone switch and transferred through a communications link to the terminal for display thereon. Similarly, further delays result due to the need to immediately upload any modified data to the switch. Thus, practically, these systems have significant "lag" in responding to user requests. As result, while these systems may simplify the complexities of the programming process, they do little to actually accelerate that process. 25

Specifically, power to search for duplicate entries, perform logical sorts, generate custom reports and provide other advanced features is virtually always lacking. Therefore, in order to check data or search for a problem, either each record must be manually pulled up and reviewed one at a time, or a complete mass listing must be printed and checked manually. 30

Furthermore, these management systems are often proprietary and inflexible in that they can operate with only a single brand or type of telecommunications equipment, and furthermore can only be physically connected to a single component of the telecommunications system at a time. Thus, these systems fail to provide for real-time modification of operational parameters  
5 for one or more devices having differing command structures that are integrated into a single telecommunications system or network.

As an alternative to the above solution, Northern Telecom has developed a system called Meridian Manager™, which includes a personal computer and associated software that facilitates switched connection control of one or more Meridian 1 PBXs. The Meridian Manager™ system  
10 includes a local database within the personal computer that stores a mirror image of some of the information stored within the Meridian 1 PBX primarily dealing with button assignments for telephones. Thus, when some of the information in the PBX is to be changed, the change can be made in the local database and subsequently downloaded to the PBX at a desired time. In this manner, the "lag" associated with retrieving and displaying the information programmed  
15 in the PBX is reduced. Again, however, a skilled technician is unable to gain any efficiency with such systems and thus is unable to reduce the time or costs associated with program changes of these devices.

A similar system, called Switchview by Switchview, Inc. includes software that facilitates switched connection control of one or more Meridian 1 PBXs. Like the Meridian  
20 Manager™ system, the Switchview system includes a local database within a computer that stores information used to control the operation of the Meridian 1 PBX. Like Meridian Manager™, however, the Switchview system fails to provide a real-time interconnection with multiple telecommunications devices having differing operating command structures and operating systems to allow for management and control of such devices.

25 In addition to the above devices, several additional devices have been developed to provide a less complex user interface to facilitate programming of telecommunications equipment. For example, U.S. Patent 5,309,509 to Cocklin et al. discloses a workstation having a graphical user interface for use with a manager controller to control and implement changes to telephone sets of a telephone system. The workstation enables the customer to  
30 selectively enter telephone lines, features and directory number changes into key button locations of a displayed telephone. These changes are converted into program instructions and transmitted to the manager controller to control the telephone switching system to assign the selected lines, features and directory numbers to the telephone set. The reference, however,

is directed to updating information stored at a telephone company switching office rather than at a local private branch exchange, and fails to disclose a system in which an external computer connected with PBX equipment is used for programming the PBX equipment to integrate, manage and support a plurality of different telecommunications products having diverse command structures. In addition, the reference does not disclose a system that includes the capability to integrate multiple telephone switches, brands, networks, subsystems, peripherals and software.

U.S. Patent No. 4,928,304 to Sakai discloses an electronic switching system that includes a PBX connected with an external computer. Programs for standard switching functions are stored in the PBX, while programs that apply only to a portion of the telephone terminals (called service functions) are stored in the external computer. Alteration of the service functions is accomplished by altering the programs in the external computer, thus avoiding the need to alter programs in the PBX. The reference, however, again fails to disclose a system in which an external computer connected with PBX equipment is used for programming the PBX equipment to integrate, manage and support a plurality of different telecommunications products, or that includes the capability to integrate multiple telephone switches, networks, subsystems, peripherals and software.

### Summary of the Invention

In view of the above disadvantages it is a primary object of the present invention to provide a novel telecommunications installation and management system and method for installing and managing a telecommunications switch, such as a PBX telephone switch, that overcomes the disadvantages discussed above.

It is a further object of the present invention to provide a telecommunications installation and management system for a telecommunications system that includes software that is operable on a wide variety of computing platforms, including a personal computer or personal computer network (LAN/WAN/Internet/Intranet, etc.)

It is yet another object of the present invention to provide a telecommunications installation and management system that includes one or more personal computers and associated software interconnected with a telecommunications system for transference of operational data therebetween.

It is a still further object of the present invention to provide an interface device for use between a telecommunications installation and management system and a telecommunications



system that is capable of simultaneous or near simultaneous communication with a plurality of differing telecommunications components forming the telecommunications system.

It is another object of the present invention to provide a telecommunications installation and management system and method that is capable of interfacing to, and communicating with,  
5 a plurality of different makes, models or types of telecommunication system components, such as PBX telephone switches.

It is a further object of the present invention to provide a telecommunications installation and management system and method that is capable of interfacing to, and communicating with,  
10 one or more of a PBX telephone switch, a call accounting system, a voice messaging system, a CTI device, an ACD device, or another peripheral device.

It is yet a further object of the present invention to provide a telecommunications installation and management system and method that is capable of interfacing to, and communicating with, one or more telecommunications system components, such as PBX switches or central office switches that employ different data formatting protocols.

15 It is a still further object of the present invention to provide a telecommunications installation and management system and method that is capable of interfacing to, and communicating with, one or more PBX telecommunications system components, such as telephone switches that employ different internal operating systems.

20 It is another object of the present invention to provide a telephone switch management system that is capable of communicating using a variety of different data formats and protocols depending on the make and model of a telephone component or switch with which communication is desired.

It is also an object of the present invention to provide a telecommunications installation and management system for telecommunications equipment, such as a PBX telephone switch,  
25 in which a plurality of reprogrammable parameters stored within the telecommunications equipment are also stored within a local database contained within the installation and management system.

It is another object of the present invention to provide a telecommunications installation and management system and method that reduces or eliminates time delays experienced by a  
30 user in adding, updating or modifying operational parameters of telecommunications equipment, such as a PBX telephone switch.

It is a still further object of the present invention to provide an installation and management system for telecommunications equipment, such as a PBX telephone switch, in

which user updates or modifications of reprogrammable parameters used to control the operation of the telecommunications equipment are made in a local database stored within the installation and management system, thus greatly reducing or eliminating time delays experienced by the user in performing such updates or modifications.

5 It is yet another object of the present invention to provide a telecommunications system management system and method that facilitates documenting and maintaining a telecommunications system including performing cable records management, managing patch panel configurations, tracking of trouble reports, printing and tracking service orders, managing project milestones, due dates, etc., and printing of overlay labels and other documentation for  
10 the telecommunications system.

It is a further object of the present invention to provide a telecommunications installation and management system that permits users to make updates or modifications to reprogrammable parameters used to control the operation of telecommunications equipment, such as a PBX telephone switch, without such changes becoming automatically or manually effective until a  
15 later time determined by the user.

It is yet another object of the present invention to provide a telecommunications installation and management system in which desired changes or updates to operational parameters of a telecommunications system received from users of the system and are received and stored externally, checked for omissions, checked for errors or duplications and processed  
20 prior to downloading to the telecommunications system.

It is a further object of the present invention to provide a telecommunications installation and management system that permits users to automatically or manually initiate updates or modifications to reprogrammable parameters used to control the operation of telecommunications equipment, such as a PBX telephone switch, in response to an emergency  
25 situation.

It is an additional object of the present invention to provide a telecommunications installation and management system in which user updates or modifications of reprogrammable parameters used to control the operation of telecommunications equipment, such as a PBX telephone switch, are retained in a local database and uploaded to the telecommunications  
30 equipment at a later predetermined time.

It is still a further object of the present invention to provide a telecommunications installation and management system that generates a log confirming receipt and acceptance by

a telecommunications system of user updates or modifications of reprogrammable parameters used to control the operation of the telecommunications system.

It is another object of the present invention to provide a telecommunications installation and management system that maintains a back-up of critical operational data necessary to the  
5 operation of the telecommunications system.

It is yet another object of the present invention to provide a telecommunications installation and management system that allows a system operator to create a duplicate copy of control information for a telecommunications system, network or peripheral device, to modify that information offline, and to perform a mass download of that information to the  
10 telecommunications system at a predetermined time.

It is another object of the present invention to provide a telecommunications installation and management system and method that automatically updates or modifies one or more operational parameters used to control the operation of telecommunications equipment, such as a PBX telephone switch, in response to a command from a user to add, update, delete or  
15 modify another of such operational parameters.

It is a further object of the present invention to provide a telecommunications installation and management system for a telecommunications system in which a plurality of duplicative reprogrammable parameters stored within the telecommunications system need only be stored once within a local database contained within the installation and management system.

It is a still further object of the present invention to provide a telecommunications installation and management system for a telecommunications system in which at least one reprogrammable parameter is retrieved from a local database contained within the installation and management system and is formatted for transmission to the telecommunications system depending on the capabilities of the telecommunications system.  
20

It is yet another object of the present invention to provide a telecommunications installation and management system for a telecommunications system in which a reprogrammable parameter is retrieved from a local database contained within the installation and management system and is converted into one or more different formats suitable for storage and use in one or more different telecommunications devices forming the telecommunications  
25 system.  
30

It is yet a further object of the present invention to provide a telecommunications installation and management system that expedites upgrading, expansion, contraction or deliberate downsizing with automatic relocation of displaced components of telecommunications

equipment by storing data that represents what components are where, what are the sub-components of each device, what changes can be made based on present inventory, and what program changes are necessary in view of these changes.

5 It is another object of the present invention to provide a telecommunications installation and management system that tracks inventory including internal components and their precise placement within each telecommunications device to permit automatic determination of parameters and configuration in response to a user request, for example, moving of certain telephone stations.

10 It is a still further object of the present invention to provide a telecommunications installation and management system capable of downloading programming information from an installed piece of telecommunications equipment, translating such programming information into a format suitable for a replacement for such piece of equipment and uploading the translated information to the replacement equipment.

15 It is another object of the present invention to provide an installation and management system for a telecommunications system that includes the capability to perform some or all of the tasks typically performed by discrete telecommunications devices, thus reducing or eliminating the required number of discrete telecommunications devices and providing further flexibility to the telecommunications system.

20 It is a further object of the present invention to provide a telecommunications installation and management system for a telecommunications system that includes an interface device used to facilitate transfer of information from the installation and management system to the telecommunications system.

25 It is yet another object of the present invention to provide a telecommunications installation and management system in which communication paths to a plurality of managed subsystems are duplicated in order to provide redundant communications capability and in which a communications failure is automatically detected and a secondary communications link is used.

30 It is yet another object of the present invention to provide a telecommunications installation and management system that reduces or eliminates duplicate data entry when installing or maintaining telecommunications equipment.

It is yet another object of the present invention to provide for all of the aforementioned for non-telecommunications devices, such as, for example, a router, hub or bridge, where the

non-telecommunications device offers a communications path suitable for management of the device and the device contains data that can desirably be managed or manipulated.

These and other objects of the invention which will be apparent on reviewing the specification and microfiche appendix can be achieved using the improved telecommunications  
5 installation and management system and method disclosed herein that automates the installation and maintenance of a telephone switch and associated ancillary equipment. The present invention provides a telecommunications system installation and management device and method that includes a common, user friendly interface for managing, controlling, updating and monitoring a telecommunications switch, such as a private branch exchange telephone switch  
10 and associated (or disassociated) peripheral telecommunications equipment. The device is capable of managing and controlling a plurality of different types of telecommunications equipment, such as telephone switches, call accounting systems and voice messaging systems, provided by various different manufacturers and having differing command protocols and/or operating systems to thereby seamlessly integrate the equipment into an easily managed  
15 telecommunications system. A local database within the telecommunications system provides for near real-time access and modification of programming information for the telecommunications equipment and further provides for redundancy in the event that the telecommunications equipment should fail. In addition, real-time or near real-time interconnection with all managed subsystems is provided to facilitate immediate update of  
20 operational parameters in response to user requests.

#### Brief Description of the Drawings

Figure 1 illustrates a schematic block diagram of the present invention and the interconnection between a computer system programmed in accordance with the present invention and one or more telecommunications subsystems.

25 Figure 2 illustrates a preferred embodiment of the present invention wherein multiple code operated switches are connected or cascaded together to provide interconnection between a computer system programmed in accordance with the present invention and one or more managed telecommunications subsystems.

Figure 3 illustrates an alternative preferred embodiment of the present invention that  
30 includes a local or wide area computer network to interconnect a computer system programmed in accordance with the present invention and one or more managed telecommunications subsystems.

Figure 4 illustrates a preferred layout for a main menu of a computer programmed in accordance with the present invention.

Figure 5 illustrates a typical record stored within a database of a computer programmed in accordance with the present invention.

5        Figure 6 illustrates a preferred layout for a Utilities submenu of a computer programmed in accordance with the present invention.

Figure 7 illustrates a preferred layout for a Work Order submenu of a computer programmed in accordance with the present invention.

10       Figure 8 illustrates a preferred layout for a System Connections submenu of a computer programmed in accordance with the present invention.

Figure 9 illustrates an overview of a preferred method for developing, translating, transmitting and confirming receipt of operational parameters for managed subsystems of a telecommunications system in accordance with the present invention.

15       Figure 10 shows a flowchart illustrating one preferred method for transmitting operational parameters to managed subsystems and for confirming accurate receipt of such operational parameters by the managed subsystems in accordance with the present invention as illustrated.

20       Figure 11 shows a block diagram depicting one feature of the present invention wherein similar data, such as a name or extension number, need only be stored once within a record in an internal database of the present invention.

#### Detailed Description of the Preferred Embodiment

Documented source code for a preferred embodiment of the operational software used in the present invention is provided in the microfiche appendix that is part of this specification. Upon reviewing the source code for the operational software in the microfiche appendix, in  
25       conjunction with the description and drawing figures in the main part of the specification, those skilled in the art will fully understand the features and operating characteristics of the present invention.

As described in detail below, one preferred embodiment of the present invention includes a computer system, such as a personal computer, connected with a telecommunications system  
30       through a communication path. The personal computer system includes operational software, a preferred embodiment of which is included in the microfiche appendix.

The source code in the microfiche appendix includes twenty-three files - twenty files having a ".prg" extension and three files having a ".fmt" extension. Generally, the ".prg" files are program files that, in this preferred embodiment, conform to the Borland, dBase V programming language. The ".fmt" files, including TRUNKS.FMT, PROFILE.FMT and  
5 REPAIRS.FMT are screen entry format files that are used to determine the format of information to be received from a user. The functions of the specific programs are discussed below.

The SITE.PRG program contains the main application code of the present invention. SITE.PRG handles the display of menus and database records for user information. SITE.PRG  
10 further contains low-level communication services and supporting functions as well as the subroutines for generating reports, work order processing, entry and editing of database fields, look-up and data validation functions and rules. SITE.PRG uses several ".fmt" files for site specific or generic data entry screens as required. Other subroutine calls include calls to external programs that control the various aspects of communications and relationships with  
15 managed subsystems such as a specific brand of PBX or voice-processing system.

The F9600.PRG file contains the communication routines that are specific to issuing programming changes in the Fujitsu F9600 PBX series. Also contained are utilities that allow the present invention to synchronize and automatically populate its local database tables with information contained within a Fujitsu PBX or to conversely program the Fujitsu PBX as a  
20 single operation from information contained within the internal database of the present invention. This module accounts for the many nuances and sequences that must normally be performed manually for operations such as adding or deleting telephones (or other native devices) for the Fujitsu PBX. This program also contains additional functionality for interfacing with the Fujitsu PBX including an interpreter of the Fujitsu F9600 EMMML programming  
25 templates to allow native programming of the PBX without using a separate maintenance terminal. As changes are made in the local database of the present invention to fields representing User Names, Key Buttons Assignments, Feature Class, Call Forwarding, Pickup Groups etc., this module processes the requests to the F9600 PBX and verifies the changes by querying the F9600 PBX in a follow-up error check.

30 Importantly, the preferred embodiment of the present invention as embodied by the source code in the microfiche appendix is intended to operate with a Fujitsu F9600 type PBX. Of course, one of skill in the art will appreciate from the discussions herein and the source code in the appendix that the present invention could be adapted to operate with any desired PBX or

other telecommunications equipment through the provision of a suitable program similar to the F9600.PRG program. Furthermore, non-telecommunications equipment, such as routers, hubs, and bridges, can be managed through the replacement of the F9600.PRG program with another program for interfacing with the non-telecommunications equipment. Thus, where it is desired  
5 to use the present invention with other telecommunications or non-telecommunications systems, the F9600.PRG program would be replaced with another suitable program for interfacing with the desired equipment. For example, where an AT&T PBX telephone switch is to be managed, the F9600.PRG could be replaced with a program that employs the same novel and unique techniques, logical assumptions and relationships to control the AT&T PBX telephone switch.  
10 Furthermore, where multiple devices are to be managed, multiple device specific control programs, such as the F9600.PRG program, could be operated at the same time in accordance with the present invention.

The EXPORT.PRG program is used to export directory names for Fujitsu dial-by-name servers and external directory systems (such as the IBM mainframe Personal Records  
15 Management System) which need to be synchronized to the master directory held in the internal database of the present invention.

The CENTIGRA.PRG program contains communication routines that are specific to issuing programming instructions to the Centigram Series of voice processing systems. Also contained are utilities that allow the present invention to synchronize and automatically populate  
20 its database tables with information contained within a Centigram voice processing system or to conversely program the Centigram voice processing system in a single operation from information contained within database tables of the present invention. This module accounts for the many nuances and sequences that must normally be performed manually for operations such as adding or deleting mailboxes from the Centigram system. As changes are made in the  
25 local database of the present invention to User Names, Department, Operator Extension Number, Feature Class, etc., this module processes the requests to the Centigram voice processing system and verifies the changes by querying the Centigram system in a follow-up error check. Similarly, the OCTEL.PRG program contains the communication routines that are specific to issuing programming instructions to the OCTEL series of voice processing  
30 systems and for performing the other ancillary functions discussed above in connection with the CENTIGRA.PRG program.

The CHECK.PRG program contains routines used to validate data integrity and validity in the internal database globally, usually before programming a new telecommunications device,



such as a telephone switch, voice processing system, etc. This program also contains routines used to create and upload operational parameters for a new PBX system from scratch. The ASSAC.PRG, ASSDICL.PRG, ASSVL.PRG, ASSMLDT.PRG, ASSPICL.PRG, ASSSLT.PRG, and ASSICLG.PRG programs contain the routines used by the CHECK.PRG program to generate Fujitsu F9600 commands for building/loading an F9600 PBX from a completed local database within the present invention.

The SETUP.PRG program is used to configure the present invention during an initial setup phase. This program allows selection of defaults such as dialing plan and other operational nuances, and then builds an initial local database for use in the present invention.

The REP.PRG, REP1.PRG, and REP2.PRG programs provides generic report support and generation in the present invention. These programs allow the present invention to create ad-hoc queries and reports that may be browsed on-screen, printed, or saved to disk for export to other systems.

The DESI9600.PRG program contains the routines for reading telephone related data contained within the present invention and printing it on pre-printed facemat designation labels as one seamless operation. As key-button assignments are re-programmed on a digital telephone, this program prints a newly updated label with additional instructions such as Name, Location, Department and other pertinent information that is needed to maintain current desktop information. The program automatically adjusts and prints Direct Inward Dial prefixes and other site specific rule based information on the facemats.

Finally, the BACKUP.PRG program contains support for backup and archiving of the local database of the present invention and the PROJECT.PRG program provides support for basic project management functionality in connection with the management and support functions of the present invention.

Referring first to Figure 1, a schematic block diagram of the present invention and the interconnection between a computer system programmed in accordance with the present invention and one or more managed telecommunications subsystems is shown. As can be seen in Figure 1, the present invention comprises a telecommunications installation and management system 10 that typically includes a personal computer data processing portion 12 having an input device 14, such as a keyboard and/or mouse, and an output device 16, such as a video display terminal. As shown in Figure 1, data processing portion 12 is connected with input device 14 for receiving input therefrom and is further connected with output device 16 for displaying information to a user of the system 10. While system 10 is preferably implemented

using a personal computer, any computer capable of performing the functions described below could be used in accordance with the present invention. Furthermore, where input device 14 is preferably a keyboard or mouse and output device 16 is preferably a video display terminal, any suitable input and output devices could be used including touch screens, light pens, read/write compact disks, etc.

Telecommunications installation and management system 10 is connected with one or more managed telecommunications subsystems shown generally at 18 through interface circuitry 17. Specifically, system 10 is connected by communication path 19 to interface circuitry 17 and interface circuitry 17 is connected by communication paths 20 to one or more of a first Private Branch Exchange (PBX) telephone switch 22, a second PBX telephone switch 23, a call accounting system 24 and a voice processing system 26, such as a voicemail system and any other device 31 such as a router, hub, bridge, etc. User terminals, such as telephone stations, can be connected to telecommunications subsystems 18 as required. For example, telephone stations 28 can be connected to PBX telephone switch 22 through a plurality of suitable connections 30.

As illustrated in Figure 1, interface circuitry 17 serves to receive information from the system 10 through communication path 19 and to forward that information to an appropriate telecommunications subsystem 18 through one of communication paths 20, as well as to receive information from telecommunications subsystems 18 through communication paths 20 and to forward that information to system 10 through communication path 19. In one preferred embodiment, interface circuitry 17 is a code operated switch, that operates to receive information from system 10 through communication path 19 and to process that information to generate appropriate selected data for output to each of the telecommunications subsystems 18. This selected data is then transmitted through communications paths 20 from interface circuitry 17 to each of the telecommunications subsystems, as appropriate. As described in more detail below, the code operated switch provides for bi-directional communication between a plurality of devices, such as the system 10 and the telecommunications subsystems 18 in the present invention.

While interface circuitry 17 could include a single code operated switch, such a configuration would limit the number of telecommunications subsystems that could be supported by the present invention to the number of available outputs on the single code operated switch. Thus, in accordance with another preferred embodiment of the present invention, multiple code

operated switches are connected or cascaded together to allow for connection of additional telecommunications subsystems 18.

Figure 2 illustrates one such configuration. As seen in the example of Figure 2, three code operated switches are daisy-chained together to increase the number of managed  
5 subsystems that can be controlled by the present invention. Specifically, as seen in Figure 2, interface circuitry 17 includes a first code operated switch 210, a second code operated switch 220 and a third code operated switch 230. Each switch 210, 220, 230 includes an input 212, 222 and 232, respectively, and a plurality of outputs (such as, for example, 64 outputs) designated generally at 214, 224 and 234, respectively. One output 216 from first code  
10 operated switch 210 is connected to input 222 of the second code operated switch 220. Similarly, one output 226 of the second code operated switch 220 is connected to input 232 of the third code operated switch 230. In this manner, the three code operated switches 210, 220 and 230 are daisy-chained together.

Each of the three code operated switches in this configuration provides for bi-directional  
15 communication between the inputs and outputs of each switch. Thus, data provided on communication path 19 to input 212 of first code operated switch 210 will be transferred to one of the outputs 214. Which output the data will be transferred to is controlled by command parameters passed with the data to input 212. Thus, each one of outputs 214, except output 216 that is connected to input 222 of the second code operated switch 220, can be connected to  
20 managed subsystems to be controlled by the present invention, such as telecommunications subsystems 18. Similarly, each one of outputs 224, except output 226 that is connected to input 232 of the third code operated switch 230, can also be connected to managed subsystems to be controlled by the present invention. Since the embodiment shown in Figure 2 only includes three code operated switches cascaded together, all outputs 234 of the third code operated  
25 switch 230 can be connected to additional managed subsystems. Of course, if additional outputs are required, additional code operated switches could be cascaded to third code operated switch 230 as needed depending on the number of subsystems to be managed by the present invention.

As known to those of skill in the art, information received at input 212 of first code  
30 operated switch 210 is bifurcated into a series of discrete data packets for transmission to each of the outputs 214. The division of the input data is controlled through the provision of commands embedded in, or transferred with, the input data. Thus, when multiple code operated switches are connected together as shown in Figure 2, relatively short data packets intended for directed transmission to subsystems are provided at all outputs 214 other than

output 216, which is connected to input 222 of the second code operated switch 220. The data packet transferred to output 216 is a concatenation of a plurality of data packets and control information that is further bifurcated as required to be provided to outputs 224 of the second code operated switch 220. A similar approach is used to transfer information to outputs of the  
5 third (or fourth, etc. where more than three switches are used) code operated switch 230.

Referring again to Figure 1, communications paths 19 and 20 may be any suitable connection for transferring information between the system 10 and interface circuitry 17, and between interface circuitry 17 and telecommunications subsystems 18. In one preferred embodiment of the present invention, communications paths 19 and 20 include RS-232 serial  
10 cables connected between corresponding data ports on the system 10 and the interface circuitry 17 and between interface circuitry 17 and telecommunications subsystems 18. In another preferred embodiment, communications paths 20 comprise a standard telephone connection used to transfer data, such as a dial-up modem connection. Of course, any suitable connection can be used for communications paths 19 and 20 provided that information may be exchanged  
15 therethrough. Thus, an ISDN link, dial-up or dedicated modem link, a direct serial or parallel link, a wireless data link (including AM, FM, digital, or any other suitable modulation scheme), a packet-switched network, an internet interconnection, or any similar or equivalent connection can advantageously be used with the present invention.

As discussed above, in one preferred embodiment of the present invention, interface  
20 circuitry 17 is one or more code operated switches. In an alternative preferred embodiment, interface circuitry 17 includes a local or wide area computer network, such as an ethernet network, token ring network, FDDI (fiber distributed data interface), CDDI (copper distributed data interface), ATM (asynchronous transfer mode) network, etc. In such a system, each of the telecommunications subsystems 18 would be connected to the network through suitable  
25 network interface circuitry, or NIC. Also, any hybrid of the aforementioned could be used, such as, for example, one code operated switch, one modem, three RS-232 serial interconnections, one FDDI, one NIC, one BRI ISDN interconnection, and one Internet interconnection. In addition, where it is impossible or undesirable to directly connect one or more of telecommunications subsystems 18 to the network infrastructure, a communications  
30 server can be used to facilitate communication with these peripherals. Specifically, a communications server, such as a personal computer, would be connected to the network through suitable network interface circuitry and would communicate with the peripherals through a serial or other suitable data link.

Figure 3 illustrates this preferred embodiment of the present invention, where like references numerals from Figure 1 are used for like components. As seen in Figure 3, interface circuitry 17 includes a local or wide area network 300. Communications paths 19 and 20 have been replaced with network interface circuitry 302 and 304 respectively, which could include  
5 a network interface circuit card and associated cable to connect that card to the network 300. In the embodiment shown in Figure 3, telecommunications subsystems 18 interface directly to network 300 through network interface circuitry 304. Therefore, telecommunications subsystems 18 must be capable of connecting with network interface circuitry 304. In the most preferred embodiment, each of telecommunications subsystems 18 has a computer interface slot  
10 for receiving a standard network interface card that forms a portion of network interface circuitry 304.

In the event that telecommunications subsystems cannot be directly connected to network 300, they may still be controlled in the embodiment of Figure 3 through another data communications interface, such as a serial data communications port. This is accomplished  
15 through the use of a communications server 310. As shown in Figure 3, communications server 310 is connected to network 300 through suitable network interface circuitry 306, which in a preferred embodiment is similar to circuitry 304 and includes a network interface card and associated cable. Communications server 310 could be, for example a personal computing system with associated communications software and circuitry 306 could be a network interface  
20 card, such as an ethernet network interface card and interconnecting cable.

Communications server 310 is connected with one or more telecommunications subsystems shown generally at 318 through communications paths 311. Telecommunications subsystems 318 could include any suitable devices similar to those of managed subsystems 18 and in the embodiment shown in Figure 3, subsystems 318 include a third Private Branch  
25 Exchange telephone switch 312, a call accounting system 314, and a miscellaneous host 316, which could be another PBX, call accounting system, voice processing system, computer telephony interface (CTI) device, Automatic call distribution (ACD) device, internet server, or other suitable device. Furthermore, although not shown directly in Figure 3, the cascaded switch arrangement of Figure 2 could be attached to communications server 310 to control a  
30 plurality of managed subsystems in a similar manner as that described above in connection with Figure 2.

As noted above with respect to communications paths 19 and 20, communications paths 311 may be any suitable connection for transferring information between the communications

server 310 and telecommunications subsystems 318. In one preferred embodiment of the present invention, communications paths 311 include RS-232 serial cables connected between corresponding data ports on the communications server 310 and telecommunications subsystems 318. In another preferred embodiment, communications paths 311 comprise a standard telephone connection used to transfer data, such as a dial-up modem connection. Of course, any suitable connection can be used for communications paths 311 provided that information may be exchanged therethrough. Thus, an ISDN link, dial-up or dedicated modem link, a direct serial or parallel link, a wireless data link (including AM, FM, digital, or any other suitable modulation scheme), a packet-switched network, an internet interconnection, or any similar or equivalent connection can advantageously be used with the present invention.

The operation of system 10 will now be discussed in detail. As described above, one preferred embodiment the present invention includes a computer system, such as a personal computer, connected with one or more telecommunications devices through a communication path, and including operational software, a preferred embodiment of which is included as source code in the microfiche appendix. While the primary features and functions of the present invention provided by this operational software are described below, reference to the appendix by those of skill in the art will reveal many additional capabilities of the present invention.

Referring generally to Figures 1-3, in operation, system 10 receives and stores information necessary to control the operation of the managed telecommunication subsystems 18 connected thereto. Thus, when connected with PBX switch 22, system 10 stores information used to control the operation of PBX switch 22 including key button assignments, extension numbers, user name, etc. In addition, to facilitate maintenance and record keeping of the telecommunications system, system 10 also includes information relating to the physical layout of the telecommunications system, including the location, department code, and cable number of telephone stations connected thereto. Similar information can be stored in system 10 for any additional telecommunications subsystems 18 as necessary.

In one preferred embodiment, system 10 includes an internal database that includes a plurality of records, each including a plurality of values, used to control telecommunications subsystems 18. Each record can be indexed by any suitable means, for example, by an extension number of a telephone station connected with PBX telephone switch 22. Importantly, in accordance with the present invention, where telecommunications subsystems 18 include multiple different types of devices, a single record is stored that includes sufficient information to control each of the different types of equipment. For example, where similar data, such as

extension number, is required for operation of both PBX telephone switch 22 and call accounting system 24, this information need only be stored once within a record in the internal database included in system 10. Of course, such information could be stored more than once for redundancy or back-up purposes.

5        Thus, where changes or updates are made to the configuration of the telecommunications system, the updated or modified data need only be entered once by an operator of system 10. That is, if a user of, for example, PBX switch 22 moves from one location to another, this change in location need only be recorded one time. System 10 will then reprogram first PBX switch 22, and any other of the managed telecommunications subsystems 18 as necessary to  
10       reflect this change in location. Thus, in accordance with the present invention, data stored in more than one of the telecommunications subsystems 18 need only be changed once in system 10 and will then be downloaded as appropriate to the telecommunications subsystems 18 when necessary.

         Furthermore, system 10 will also take additional steps to facilitate this change in  
15       location. Specifically, for example, system 10 will reprint designation strips for all phones that included the moved station, updating of cable records, etc. Thus, in accordance with the present invention, data reflecting an update or change to the managed telecommunications system is only required from the user a single time - with system 10 automatically making additional updates, modifications and changes in response thereto. In this manner, maintenance  
20       of the system is greatly simplified and thus the time required for such maintenance is reduced.

         This feature of the present invention, where similar data, such as extension number, need only be stored once within a record in the internal database included in system 10, is illustrated more clearly in Figure 11. As seen in Figure 11 a plurality of managed subsystems 18, including managed subsystems 1100, 1102, 1104 and 1106, each include an internal  
25       database 1101, 1103, 1105 and 1107 containing operating information for the respective managed subsystem. The information contained in each of the internal databases 1101, 1103, 1105 and 1107 is transferred to system 10 and temporarily stored in databases 1110, 1112, 1114 and 1116 respectively. The information within these temporary databases are then compacted or compressed into a consolidated internal database 1118 stored within system 10.

30       Specifically, when receiving information from any of the managed subsystems, system 10 first performs protocol and connectivity conversion to recover the information depending on the specific type, brand and operating system of the managed subsystem 18 from which the information was received. System 10 then performs a relational compression of this

information and stores the result within internal database 1118 such that common information stored within each of the managed subsystems need only be stored a single time within the internal database 1118 of system 10 as described above. A reverse process is followed to transfer information from the internal database 1118 of system 10 to one of the managed  
5 subsystems 18. Specifically, information is retrieved from the internal database 1118 and a suitable process is performed to format, or uncompress, the information into a suitable form for the managed subsystem 18 to which the information will be transferred. Thereafter, the information is placed into the proper protocol and transmitted to the appropriate managed subsystem 18.

10 Importantly, the present invention provides a system and method capable of seamlessly integrating differing telecommunications support products provided from various different manufacturers or having differing operating systems. Generally, each different manufacturer of telecommunications equipment provides a slightly different command structure, or protocol, to communicate with that equipment. Thus, referring to Figure 1, while first telephone switch  
15 22 may be made by a first manufacturer and require a first command sequence to provided to program a specific parameter, second telephone switch 23 could require a second, completely different, command sequence.

In accordance with the present invention, the ability to communicate with any number of differing types of telecommunications equipment employing any number of differing  
20 command structures or protocols is provided. Specifically, the telecommunications installation and management system of the present invention includes the ability to format commands in differing manners depending on the specific equipment attached thereto. Thus, prior to transferring data or other information to the telecommunications equipment to be controlled, this information is first properly formatted so as to be received and understood by the  
25 appropriate piece of equipment.

In a preferred embodiment of the present invention, a plurality of different software drivers are used based on the identity of the telecommunications equipment to be controlled by the system. Upon identification of the equipment by a user of the system, an appropriate driver is selected and used for all subsequent communication with that piece of equipment. Similarly,  
30 in accordance with the present invention, different software drivers are used for telecommunications equipment having different command structures and operating systems. Upon suitable identification of the equipment by a user, an appropriate driver is selected based on the known command structures and operating system parameters and used for all subsequent



communication with that piece of equipment. In this fashion, the architecture of the software system is said to be "modular" or "object oriented."

Another important aspect of the present invention lies in the integration of the above described telecommunications equipment management and control with other telephony services typically performed either manually or through other special purpose equipment. Since detailed information on the operational parameters of each of the telecommunications equipment under control of the present invention is available, the present invention is uniquely situated to compile and output reports and other information that traditionally have been kept through manual records.

For example, tracking of repair requests can be easily implemented in accordance with the present invention by providing the ability to associate such requests with a predetermined record in the internal database within the system 10. While the recordation of such requests is not typically stored within the telecommunications equipment that is under the management and control of the present invention, this information can be included in the local database that also stores this information. Thus, in addition to storing parameters necessary to control the operation of the telecommunications equipment, the present invention also tracks ancillary information that can increase the efficiency of maintaining the telecommunications system.

When initially activated, system 10 provides a login screen to the user. Upon successfully entry of a user name and password, system 10 first attempts to communicate with each of the managed subsystems, for example telecommunications subsystems 18. If a problem is encountered in communicating with any of the managed subsystems, system 10 will display an appropriate error message and will normally temporarily suspend access until the communication problem is corrected. If, however, communications cannot be established, it is possible to operate system 10 in an "offline" mode. In this mode of operation, system 10 will not attempt to communicate with the managed subsystems and will not perform internal checks for standard data entry errors such as the existence of an extension record prior to allowing the number to be added to a button on a telephone station. Since error checking is not performed during data entry, prior to downloading the changed records to the managed subsystem, a check for any logical data entry errors can be performed at a later time as described below.

Upon successful communication with one or more of the managed subsystems, or upon initiation of offline mode, system 10 displays a main menu substantially as shown in Figure 4. Of course, those of skill in the art will understand that the menu options shown in Figure 4 can

be modified or supplemented as required to provide user functionality. Importantly, however, one feature of the present invention is the provision of a standardized user interface that can be used to enter and change information that is used to control various different telecommunications devices. Thus, in accordance with the present invention, the main menu shown in Figure 4 will have substantially the same appearance regardless of the telecommunications system to be managed and regardless of the differing devices used to make up that telecommunications system. Therefore, once an operator is familiar with the operation of the present invention, that operator will be able to update and control an almost unlimited number of differing devices without having to relearn a new command interface. Thus, whether the user is (1) managing and controlling an integrated telecommunications package including a PBX, call accounting system and voice messaging system made by a common manufacturer; (2) managing and controlling a telecommunications system including devices made by diverse manufacturers; or (3) managing and controlling multiple telecommunications systems, each having devices made by the same or diverse manufacturers, the same user friendly command interface is used.

As noted above, system 10 includes an internal database that includes a plurality of records, each including a plurality of fields containing information such as extension number, name, button assignment values, voicemail parameters, cable records, and other operational data. As generally designated at 400 in Figure 4, system 10 includes several standard searches that can be used to locate a given record and display the contents of its fields. For example, a user can locate information regarding a particular telephone by entering an extension 402, last name 404, equipment number 406, location 408, or cable number 410 by selecting the appropriate entry from the main menu shown in Figure 4. Other search criteria can be entered including room number, department, MDF and House Pair, and other user defined fields by selecting "Other Searches" option 412 from the main menu. Once a proper record is located, information may be changed and system 10 will automatically update all attached managed subsystems, such as telecommunications subsystems 18 shown in Figure 1, as required.

When performing an extension 402 search, system 10 will prompt the user for a desired extension number. Upon entry of the last digit of the extension number, system 10 will locate the corresponding record and display it to the user as described below. In accordance with the present invention, system 10 can be configured to operate with variable length extension numbers. Generally, however, system 10 requires extension numbers to be unique for each record. Thus, if multiple records for the same extension are required (i.e. for multiple listing

in a directory), the present invention provides a special field - the published number field - for this purpose.

The uniqueness requirement of the extension number serves to highlight one feature of one preferred embodiment of the present invention, which is described in more detail below in connection with the *Utilities* option 414 submenu. When receiving input from a user, system 10 checks that input to verify its validity prior to attempting to upload that information to a managed subsystem. In this manner, data entry errors that could effect the performance of the managed subsystem can be isolated and corrected prior to programming of the managed device. Thus, for example, where a user enters a duplicate extension number, system 10 will detect that duplicate entry and issue an error message to the user informing her of the duplicate extension number.

In addition, one important feature of the present invention lies in its ability to quickly detect duplicative effort in making data entries. Specifically, in accordance with one preferred embodiment of the present invention, multiple users are permitted to edit a single data record at the same time. If, however, multiple users attempt to modify the same information, system 10 will issue a warning indicating that only one user can modify that information. The remaining search options - name 404, equipment number 406, location 408, and cable number 410 - operate in a similar manner by prompting the user for a desired search criteria and then locating records that conform to that search criteria. The "other searches" option 412 provides a submenu of other fields that can be searched, preferably including the ability to search on a department name, house cable pair, MDF tie cable pair search, pick-up group search and/or data extension search. Of course, those skilled in the art will recognize that other fields and similar features for duplicate data tests could be added to this submenu to meet user demands.

From the above, it will be clear that the present invention provides comprehensive and complete searching capabilities to allow a user thereof to locate a desired record in a number of different manners. In accordance with the present invention, a record can be located based on whatever information is available to a user. When that information is not sufficient to isolate a single record, multiple records that satisfy the search criteria can be displayed in a summary form embodied as a "pop-up window" with spreadsheet-like attributes to allow the user to select the desired record for more detailed display. Thus, those of skill in the art will appreciate from the above description and the attached source code in the microfiche appendix that the present invention provides great flexibility to the user in selecting and locating a desired record for review or modification.

Once a desired record is located in the internal database of system 10 based on a given search criteria, the record will be displayed with the field used for the search highlighted to the user. The user may then scroll through the remaining records, indexed by the highlighted field, by pressing an appropriate key on input device 14 of system 10. Importantly, once a desired  
5 record is located, the user may change the highlighted search field and thereafter scroll through the remaining records as indexed by this new search field. Thus, upon locating a record by name, for example "Doe, John," the highlighted search field can be changed to the "location" field to index the database by location. Thereafter, records can be scrolled accordingly to location in order to view other telephone stations in the same or nearby location to the  
10 originally selected record in a logical, straight forward manner, avoiding the trouble of recalling the prior screen and making a different field search selection.

In addition, in order to facilitate selection of an appropriate record, system 10 provide the ability to display a shortened summary of a plurality of records at one time. Upon locating the desired record summary, a user may then access and display the detailed record by  
15 operation of an appropriate key on the input device 14. One method of activating this feature of "scanning" multiple records at a time is through actuation of an appropriate function key, such as F1, as described below.

A typical record 500 within the database of system 10 as it is displayed on output device 16 is shown in Figure 5. As seen in Figure 5, each record includes a plurality of fields that  
20 contain information for a given extension, user, or other unique field as generally indicated at 501. While many fields are displayed in Figure 5, it is a further feature of the present invention that additional "hidden" fields can be present that are only displayed when specifically requested by a user. Furthermore, while Figure 5 depicts an illustrative record display screen, the executable program as set forth in the attached software appendix allows new fields to be  
25 added, existing fields deleted, or the field display order rearranged as desired by the user of the system.

In addition, the record 500 also includes one or more status messages 502, where appropriate. For example, record 500 could display the message "upload required" as illustrated in Figure 5. This status message indicates that the current record had some changes  
30 that were not successfully updated in one of the managed telecommunications device's operating database(s). As noted above, one feature of the present invention is to provide real-time access to a plurality of telecommunications devices and to facilitate real-time modification to operating parameters of these devices. Where the system 10 cannot make such real-time modifications,

however, it will record such circumstance and notify the user that these changes could not be made. This may occur, for example, when attempting to update information in a PBX for telephone stations that are busy.

When such a situation occurs, the system 10 will attempt to retransmit these  
5 modifications the next time that the record 500 is edited. In addition, the user can actuate the F4 key on input device 14 to immediately attempt a retransmission of record 500. Furthermore, as described in more detail below, a summary report of all flagged records (including various status messages) can be generated by selecting the *Work Order Log* option 422 (Figure 4) from the main menu. Also, where multiple records are marked as "upload  
10 required," the user can select the *Upload to PBX* option 808 (Figure 8) under the *System Connections* option 424 (Figure 4) to attempt a retransmission of all records that require uploading. This feature is described in more detail below in connection with Figure 8, illustrating the *System Connections* option 424 submenu.

There are also several other status messages that could be displayed in this location in  
15 accordance with the present invention. First, the system 10 could display a "Work Order Open" message, which indicates that there are one or more work orders open for the currently displayed record. A summary of all open work orders can be received by selecting the *Work Order Log* option 422 (Figure 4) from the Main Menu. In addition, system 10 could display a status message of "Comments Exist," indicating that the generic comments field for the  
20 currently displayed record has text in it. Of course, other status messages could easily be added in accordance with the present invention, as required.

Record 500 also includes a display of currently available function keys and associated functions, as generally designated at 504. Of course, the functions assigned to each function key can be varied to suit user applications and those illustrated in Figure 5 are exemplary for  
25 one preferred embodiment of the present invention only. As seen in Figure 5, the functionality for each function key is generally intended to streamline management of the telecommunications system. Thus, by pressing the F1 key, the user can place system 10 into a "scanning" mode wherein multiple records are displayed in summary form. For example, a summary of 13 records could be displayed on a single screen, thus allowing the user to more quickly review  
30 all records to locate a record for which more detailed information is desired. The user may then access this record and receive a record display similar to that shown in Figure 5 for the selected record.

The F2 function key enters the edit mode, thus allowing the user to make changes to the information contained within the record. The editing of data is performed in any suitable manner common to computer database application, such as the presentation of the currently existing data to the user with the ability to modify or update that data as desired. Function key  
5 F3 accesses the work order menu for the extension associated with the selected record. In the work order menu, the user can add, update, or close a work order for the extension associated with the displayed record. The F4 function key, as described above, causes the system 10 to immediately attempt to upload the currently displayed record to all managed telecommunications equipment. The F5 function key allows the user to modify and/or print designation labels for  
10 the telephone station associated with the currently displayed record.

The F6 function key instructs the system 10 to delete the currently displayed record. However, the system 10 will delete the record only if doing so will not require an update of a managed subsystem. Thus, this option is most useful when deleting a record that was added for purposes of tracking cable numbers or extra listings for a directory. If the record cannot  
15 be deleted through this function because an update of a managed subsystem would be required, the system 10 will instruct the user to use the *Delete Extension Number* option 420 from the Main Menu.

As previously discussed, the present invention provides for real-time management and control of a number of differing telecommunications subsystems through a single integrated  
20 database structure. Often, these subsystems will be geographically dispersed from each other. By operating the F7 function key, a user of the present invention can access only those records relating to a single device, such as a PBX. Operation of the F7 key causes a pick list to be present to the user from which a desired PBX or managed device can be chosen. Thereafter, only records for that PBX will be displayed until the user cancels the filter command.

25 The F8 function key instructs the system 10 to print the contents of the presently displayed record, including key station button assignments and comments.

The F9 function key bypasses the standard user friendly interface of system 10 and presents the user with a command line style interface to directly communicate with a selected telecommunications device through a direct TTY terminal session. This mode of operation is  
30 similar to the existing "dumb terminal" style of interface and is typically used for troubleshooting or native host programming.

The F10 function key access a PBX verb-noun command language interpreter to allow for entry of a verb-noun combination for accessing of a program template. This mode of

operation should generally only be used when the parameters desired to be updated are not accessible through the standard record fields of system 10 and will only be available to the user when system 10 successfully attaches to and communicates with the PBX device. In this mode of operation, system 10 is similar to the Meridian Manager™ and Switchview systems discussed above.

Referring again to Figure 4, the *Utilities* option 414 will now be described in more detail. When this option is selected, a Utilities submenu having a form substantially as illustrated in Figure 6 is displayed to the user. As seen in Figure 6, the *Backup Database* option 602 creates a backup disk or disks for the database stored within the system 10. As discussed above, one preferred embodiment of the present invention includes a personal computer having suitable mass storage capability, such as a hard disk, that contains the database used to store the information for the managed devices. The number of disks and time necessary to backup the database varies depending on the number of records in the database, which is related to the number and type of devices to be managed.

The second option, *Reindex Database* 604, re-sorts the database files used in the present invention. This option is performed in the event that the database order seems erratic or if searches fail to locate valid records. In addition, this option is performed whenever the present invention does not undergo an orderly shutdown (i.e. if the system experiences a power outage prior to exiting the system software). Again, as with the *Backup Database* option 602, the time required to reindex the system database depend on the number of records present in the database.

The *Labels* option 606 allows for printing of labels for terminal blocks, such as 66M150, 110 type, Bix, Krone, and patch panels, as well as station and equipment cable labels, facemats and designation strips.

The *Pack Database* option 608 is used to remove all records that have been marked for deletion and to simultaneously reindex the database as in the *Reindex Database* option 604. When a record is "deleted" using a delete command, that record will be removed from viewing and report functions, but the information will remain in the database structure until the database is packed. Thus, the present invention provides support for recovering "deleted" information prior to packing of the database from which the information has been deleted.

The *Phone Count* option 610 causes system 10 to count every type of phone present in the database and to display the total number for each phone type. This information is updated automatically as records are added, deleted or changed, thereby ensuring up-to-date and

accurate information on system inventory. Where multiple PBX systems are being controlled, the present invention allows the user to pick a specific system for which the phone count will be performed. In addition, this option provides information for all PBXs in a system where multiple PBXs are present. Specifically, this option provides the following information: (1)

- 5 Current PBX (Allocated) - the total number of records by phone type for the current PBX including records that have not yet been assigned PBX equipment numbers; (2) Current PBX (Active) - the total number of records by phone type for the current PBX that have PBX equipment numbers assigned to them; (3) Entire Site (Allocated) - the total number of records by phone type for all PBXs including records that have not yet been assigned PBX equipment  
10 numbers; (4) Entire Site (Active) - the total number of records by phone type for all PBXs that have PBX equipment numbers assigned to them. Where a single PBX is being managed and controlled by system 10, the "current" and "entire" results will be the same.

The *Check and Load Database* option 612 provides a further submenu of tests that can be performed by the present invention on the database structure contained within system 10.

- 15 The different tests allow the system 10 to detect logical data entry errors such as the occurrence of duplicate data entries in the database structure of system 10. While the duplicate information may sometimes be valid (i.e. two employees having the same name), duplicate information may be the result of a data entry error or an error in customer information. The CHECK.PRG program discussed above performs this function in one preferred embodiment of the present  
20 invention.

This option will generally not correct any errors detected, but merely serves as a tool to aid the user in the detection of database errors. In most cases, the fewer duplicate entry and logical errors detected, the less likely an error will result when processing information during an add, delete or change process, or during the upload of the database information to a managed  
25 subsystem, such as a PBX system.

The *Check and Load Database* option 612 includes the following individual tests that can be performed on the database structure within system 10. First, the system checks for problems related to button assignments on telephone stations, such as digital phones, including checking that: (1) duplicate feature and extension numbers are not assigned on the same phone;  
30 (2) extension numbers assigned to buttons actually exist as valid records in the database structure of system 10; (3) extension numbers do not cross a PBX boundary in multiple PBX telecommunications systems; (4) no duplicate intercoms are assigned to the same phone; and (5) an extension number does not appear more than 31 times.



Second, the system checks for problems related to duplicate entry errors, button assignment errors, and the other additional database integrity errors. Specifically, system 10 checks for duplicate entry of the same prime extension number; the same exact name; the same room/location number; the same equipment number; the same cable number; the same MDF  
5 pair number; the same house cable pair number; and the same long distance authorization code.

In addition to the above, system 10 further checks for the following additional database integrity errors: (1) blank directory or LCD names; (2) blank equipment numbers for digital or analog telephone types; (3) blank location numbers for digital and analog telephones; (4) assigned mailbox class of service for extensions with mailboxes; (5) matching mailbox and  
10 prime extension numbers; (6) existence of pickup group pilot numbers; and (7) PBX boundary checks for pickup groups and button assignments.

The *Vacant Numbers* option 614 displays unassigned numbers in any given range of the database contained within system 10. This feature is particularly useful when assigning groups of phones or when trying to determine available numbers for planning purposes. The system  
15 prompts the user for the beginning and ending numbers of the range, and then displays all vacant numbers within that range.

The *Create Microcall SDF File* option 616 is used when the telecommunications system includes a Microcall Call Accounting system. This utility creates an export file that contains the appropriate database information from system 10 in a Standard Data Format (SDF). The  
20 Microcall system can then import this file prior to running any call accounting reports. In this manner, the requirement to manually update the Microcall system, or another brand of call accounting system, is eliminated.

The *Export Dial-By-Name* option 618 creates an export disk for use with a Fujitsu Dial-By-Name server, thus eliminating the need to manually update entries in the Dial-By-Name  
25 server. The file created by this option can be imported to the Fujitsu Dial-By-Name server, or to any other suitable device.

The *Site Profile* option 620 displays the set-up information for the system 10, including customer name and address, emergency contact numbers, communications speed settings, DID number ranges, printer adjustments, field names, data entry format requirements, field validity  
30 expressions, and other miscellaneous system default values.

The *Add New Station Record* option 622 is used to add miscellaneous records that do not have an associated extension number assigned thereto. That is, this option is used to add records for stations cables, router ports, etc., all of which do not have a unique extension

number associated therewith. Similarly, the *Remove Station Record* option 624 and the *Print Station Records* option 626 are used to delete and print such records contained within the internal database of system 10.

Referring again to Figure 4, the *Assign Extension Number* option 416 will now be  
5 discussed in more detail. Specifically, this option is selected every time a user wishes to add a new station to the managed telecommunications network. System 10 will automatically choose an available extension and equipment number, or the user may enter a choice of her own. Furthermore, minimal additional information will be required to be supplied, depending on the configuration of the telecommunications system to be managed. Generally, the minimal  
10 information required includes phone type, and the name and location of the user. System 10 will display a default phone type that can be accepted or modified by the user. In addition, if the user is unsure about the proper phone type, they may type a letter of the alphabet and system 10 will display a list of valid phone types that can be scrolled through for selection by the user.

15 Once a phone type has been selected, system 10 will check for an available PBX equipment number for the given type of phone. System 10 will display the lowest vacant extension number and the user may choose this extension, or search for and enter another available number. If the user entered number is not, in fact, available, system 10 will issue an error message and assign the next highest available extension number from the number  
20 requested. Once an available number is selected, system 10 will display a data entry screen to the user. Upon entry of this information, system 10 will automatically program a PBX, Voicemail, and any other related subsystems connected thereto as described above. Furthermore, if the telecommunications system is a multi-PBX network, system 10 will also automatically update the specific routing tables in each PBX node to ensure proper on-net  
25 dialing, name display and feature transparency for the new station. In this manner, synchronization is maintained between all related subsystems (nodes and peripherals) to ensure proper interrelation and operation of these subsystems.

The *Change Extension Number* option 418 allows a user to change an extension number in a managed PBX, including pick-up groups, hunt groups, and the line appearance on other  
30 telephones. Again, importantly, system 10 will also automatically update voicemail, call accounting, and other systems with the changed information where appropriate.

The *Delete Extension Number* option 420 is used to delete an extension and associated record from the database contained within system 10. When this option is selected, system 10

will display the Name for the selected extension and any line appearances of this extension on other phones. System 10 will then ask for confirmation to delete this extension. If the user confirms deletion, system 10 will remove all button assignments on the phone, and remove all pickup groups, hunt groups, call forwarding and message waiting information associated with the extension. Phones on which the deleted phone would appear on a feature button are also updated appropriately. System 10 will retain cable information for the given location for later re-use unless the cable number, house pair and MDF pair fields are blanked prior to deleting the record. In addition, if the station is a digital station and a data device (DTA) is defined for that station, then the data device will also be removed along with the station record.

If the extension is a Pickup group Pilot station, system 10 will display the members of the group and allow the user to select a new number as the pilot for that group. If a voicemail box is assigned to the extension, system 10 will prompt the user to confirm deletion of the associated voicemail box as well. Finally, system 10 will remove the record from view in any further searches or reports. System 10 will temporarily maintain the record information on the system until such time as a pack database command is issued. Until that time, the information may be restored if necessary.

Referring again to Figure 4, the *Work Order Log* option 422 will now be described in more detail. When this option is selected, a Work Order submenu having a form substantially as illustrated in Figure 7 is displayed to the user. The Work Order submenu generally offers choices to view and print work orders based on a variety of selection criteria. Specifically, the *Output Open Work Order Summary* option 702 will display the name, extension and room number of all open work orders to the system user. Similarly, the *Output Open Work Order Tickets* option 704 outputs an entire work order, containing all information contained within the database in system 10, for each open order. Generally, this report will provide the extension, name, department, equipment number, cable information, button assignments, trouble reported, date and time order was received, person placing the order, etc. for each open work order. Each order is printed on a separate sheet, with a "signature" and "work completed" area for a technician to complete prior to closing the work order. The *Output All Work Order Tickets* option 706 is similar to the *Output Open Work Order Tickets* option 704 except that a complete work order is output for every work order in the database of system 10 instead of just for open work orders. Of course, additional features could be added to the Work Order submenu as desired, including a technician log-on/off capability; time tracking capability; mapping

capability wherein the system would generate a map to the location where trouble was suspected; and key procurement and control procedures.

5 The *Upload Required Flagged Records* option 708 produces a report listing the names and extensions of all records in the database that are not synchronized with one or more managed subsystems, including a PBX, Voicemail, or call accounting system. All records entered in offline mode, or that encounter an error during an upload process, are flagged as requiring an upload.

10 The *Repair Code Summary Report* option 710 produces a report based on a date range of given work order activity. All work orders are summarized into categories when they are closed, including addition, deletion, program changes, voicemail problem, cable problem, equipment problem, telephone company problem, no trouble found, end-user, policy and other categories.

15 The *Search by Order Number* option 712 allows the user of system 10 to locate a work order based on an assigned work order number, which are automatically generated when a work order is initially opened. Finally, the *Service Dispatch Order Sheets* option 714 produces a report containing basic installer information used for organizing departmental moves or activities involving the relocation of up to 20 phones. System 10 prompt the user to enter a list of up to 20 extension numbers and then produces a report containing the extension, equipment number, name, department, cable and room number information.

20 Referring again to Figure 4, the *System Connections* option 424 will now be described in more detail. When this option is selected, a System Connections submenu having a form substantially as illustrated in Figure 8 is displayed to the user. The system connections submenu generally contains selections which allow the user of system 10 to establish direct connections with various managed subsystems connected thereto. Specifically, the *PBX*  
25 *Command Language* option 802 provides access to a PBX command interpreter for direct verb-noun command input. Verb-noun type commands can be generally issued to access a series of help fields and menus for a "fill in the blank" type of PBX programming template. The resulting screens and general input format are similar to that found in, for example, the Fujitsu EMMML System. In addition, commands can also be issued in an EMMML format with comma  
30 delimited arguments for direct download to the PBX or other managed subsystem(s). Where there are multiple managed subsystems including, for example, multiple PBX systems, a two or three (or more) character PBX identifier, which is assigned to each PBX in a profile setting of system 10, can be prefixed before each entered command. In this manner, quick selection

of command based programming of any managed subsystem in a network can be accomplished without requiring time consuming login and/or manual dial up procedures.

Importantly, when changes are made from the PBX command line, the internal database contained within system 10 is not updated. Therefore, the use of the *PBX Command Language* option 802 should only be used to make changes or inquiries to a managed subsystem that is not normally accessible through the other menus and options provided within system 10. Otherwise, loss of synchronization between the internal database stored within system 10 and the operational database within the managed subsystem can result.

The *PBX TTY Session* option 804 initiates a direct TTY console session using the communication parameters and communication port established in the profile configuration of system 10. This mode of operation is generally used as a troubleshooting tool to communicate with a managed subsystem or modem, and allows a user to bypass any controls placed upon the communication link by system 10.

The *Voicemail Menu Session* option 806 accesses a voicemail system console screen and performs an automated login to the voicemail system. A user of system 10 may then issue programming commands to the voicemail system using the native voicemail programming language and syntax. As with the *PBX Command Language* option 802, changes made to the voicemail system using this option do not update the internal database stored within system 10. Therefore, loss of database synchronization between the internal database within system 10 and the database within the voicemail system can occur and resynchronization will be required.

The *Upload Database to PBX* option 808 transfers information stored within the internal database of system 10 to an operational database within a PBX or other managed subsystem. System 10 can send the entire database contents or only information contained in specifically flagged records, such as records flagged as "upload required" as discussed above. By uploading only the flagged records, synchronization between the internal database within system 10 and the operational database within the PBX or other managed subsystem can quickly be achieved. In the alternative, if the user chooses to upload all records within the internal database of system 10, then system 10 will send the contents of every station record contained therein to the PBX or other managed subsystem and will override all corresponding existing programming information contained within that managed subsystem. This type of upload is usually only performed at the time of an initial system installation, or as part of catastrophic recovery procedure, etc.

The *Download PBX to Database* option 810 is used to replace all information within the internal database of system 10 with the related information located in a PBX or other managed subsystem. System 10 will query the PBX or other managed subsystem for extension, call forwarding, class of service, pickup group, button assignment information, etc. and will replace its existing information with the information collected from the PBX or other managed subsystem. In the event that system 10 does not contain any information at all (including any record) corresponding to the received extension number, system 10 will create a new record for that extension and will use the available information from the PBX or other managed subsystem to populate the fields within that record wherever possible. This operation is normally used only when changes have been made to a PBX without the use of system 10, or when installing system 10 at a new location that already has an installed telecommunications system for the purpose of constructing an initial database within system 10.

The *Assign Undefined Equipment* option 814 is normally only used to assign PBX equipment numbers for station records that have been entered in the offline edit mode. This procedure automatically assigns equipment numbers to both digital and analog telephone types within the internal database of system 10 so that they may be activated in the *Check and Load Database* option 612 discussed above in connection with Figure 6. The packages that will be needed for the desired station records must first be installed using the *PBX Package Database* option 820 discussed below in order for this routine to function properly. System 10 evaluates the available PBX packages and assigns equipment numbers based on the phone type contained in each record. System 10 then assigns equipment numbers sequentially based on the MDF pair and/or room location to facilitate efficient cross connections at the MDF.

The *Feature Access Number Plan* option 816 is used to organize, synchronize, assign and delete access codes to various features in the PBX or other managed subsystems such as call forwarding, group pick up, etc. This option allows access to the "global" features database, as well as the per switch numbering plan and trunk group assignment databases.

The *Download Voicemail Database* option 818 is used to replace all information within the internal database of system 10 with the corresponding information located in a voicemail system. System 10 will query the voicemail system for mailbox number, name, department, mailbox feature, class of service and attendant escape number and other data. System 10 will then replace all corresponding existing information with the new information collected from the voicemail system or, in the event that system 10 does not contain any information for a given

extension, system 10 will create a new record and use the voicemail system information to populate the fields where possible.

5 The *PBX Package Database* option 820 is used to assign new station trunk and other miscellaneous circuit card packages in the PBX or other managed subsystem. This option is also used to synchronize an existing PBX package database with the package database contained within system 10 for new installations, or if circuit card packages are installed in the PBX in the offline mode or using EMMML, or to facilitate large reconfigurations.

10 The *SYNCHRONIZE AUTH CODES* option 822 verifies the existence of all dialing authorization codes located within the internal database of system 10 for each PBX or other managed subsystem. System 10 queries the OFFCODE table or tables in each PBX or other managed subsystem and compares the entries with the OFFCODE value of each record within system 10. If an entry is found in the internal database of system 10 that is not located in the PBX table or tables, system 10 will automatically program the OFFCODE in the PBX. Furthermore, if an OFFCODE is found in a PBX, but is not contained within a valid record  
15 of system 10, system 10 will delete the OFFCODE from the PBX. This prevents unauthorized use of PBX trunk routes or unaccounted billing records. Therefore, it is important to make sure that all records requiring authorization codes within the internal database of system 10 have been updated prior to running this procedure.

20 The *TCSI TELNET SESSION* option 824 allows a communication session to occur between the present invention and another Host utilizing the Telnet protocol. The IP address of the Host system must be entered into system 10 and a Local/Wide area network interface card must be equipped in the system 10 to establish the Telnet session. Telnet sessions are useful because many Hosts use this standard protocol for remote access to configuration and management functions in addition to any direct serial, hardwire or dialup communication  
25 interface ports.

Referring again to Figure 4, *Trunk Information* option 426 provides a submenu containing information on PBX trunks, trunk groups, carrier information, circuit ID and trunk related repair orders. The *View/Print Reports* option 428 accesses a report generator contained within system 10. The report generator allows a user to create reports by selecting the fields,  
30 sort order, and any special filters that should be applied to the report. The resulting reports can be viewed on screen prior to printing or saved to a ASCII text file. Furthermore, the selected report criteria can be saved under unique report names for later duplication.

Finally, the *QUIT* option 430 terminates operation of the program contained within system 10, closes all open database files and writes any information in memory to the mass storage device(s), including mirrored information stored on a RAID or similar device.

Referring next to Figure 9, an overview of a preferred method for developing,  
5 translating, transmitting and confirming receipt of operational parameters for managed subsystems of a telecommunications system in accordance with the present invention is illustrated. As can be seen in Figure 9, the process begins at block 910. Next, in block 912, a system configuration database is developed. The development of the system configuration database could be accomplished in a number of different and advantageous ways depending on  
10 the objective to be achieved. For example, if it is desired to merely add a new user or to change the location of an existing user, this updated information may be manually entered into an existing system configuration database by an operator in a manner described above in connection with Figures 4-8. In the alternative, if a new or upgraded component of a telecommunications system is to be installed, system configuration information could first be  
15 downloaded from the old component and any desired changes entered therein to form the system configuration database.

Upon development of the system configuration database, control transfers to block 914, where the system database is translated into system configuration information having a suitable format for the desired telecommunications device or devices. That is, depending on the  
20 telecommunications devices that are to be updated or reprogrammed, the data contained in the system configuration database is converted into a format suitable for transmission to the desired telecommunications system. This format can vary depending on the make or model of the telecommunications device to be reprogrammed and further depending on the specific command structure and operating systems employed in such devices. As previously noted, in accordance  
25 with one preferred embodiment of the present invention, a plurality of software drivers are provided to facilitate communications between system 10 and a number of differing managed subsystems. Any necessary format conversion is preferably performed by these driver routines, thus increasing the flexibility and adaptability of the present invention.

Next, in block 916, the formatted system configuration information is transferred to the  
30 appropriate managed telecommunications subsystems. As described above in connection with Figure 1-3, the transmission of this information can be performed in a variety of ways depending on the physical configuration of the telecommunications system. Importantly, were multiple



differing managed subsystems make up the telecommunications system, the configuration information will be transferred to each of these system in a suitable format.

After transmission of the formatted configuration information, control transfers to block 918, where the system 10 confirms receipt of the system configuration information by each of the managed subsystem. In this manner, system 10 confirms that the system configuration information was properly received and processed by each of the managed subsystems. After this confirmation, system 10 discards the previous information and updates its internal database appropriately, thus ensuring synchronization between the internal database contained with system 10 and the operation databases within each of the managed subsystems.

Referring next to Figure 10, a flowchart illustrating one preferred method for transmitting operational parameters to managed subsystems and for confirming accurate receipt of such operational parameters by the managed subsystems in accordance with the present invention is illustrated. In Figure 10, references to the line number for various modules of the source code contained in the microfiche appendix are included to facilitate review thereof. Specifically, an "S" designation indicates that the following number refers to a line number in the SITE.PRG program; an "F" designation indicates that the following number refers to a line number in the F9600.PRG program; and a "C" designation indicates that the following number refers to a line number in the CENTIGRA.PRG program.

As seen in Figure 10, the process begins in block 1000. Control transfers to block 1002, where a primary managed host system for the record to be downloaded is identified and selected. Reference to line 1979 of the SITE.PRG program in the microfiche appendix is made for further information on the specific details of this step. Typically, the primary host system could be a Private Branch Exchange telephone switch, such as a Fujitsu 9600 PBX switch. Control then transfers to block 1004, where the system saves field values for all Host subsystems.

Subsequently, in block 1006, editing of the selected record is permitted by the user to enter or change information as desired. Upon completion of the modifications to the record, control transfers to block 1008, where the system 10 determines if any fields that impact the operation of the primary host subsystem have changed. If any fields have changed, the system marks the record as "upload required" in block 1010.

Next, in block 1012, system 10 determines in the primary host subsystem is online. If the primary host subsystem is online, control transfers to block 1014, where it is determined if any operational data was changed for each field in the primary host subsystem. If a field in

the primary host subsystem was changed, control transfers to block 1016, where an appropriate command is issued to the host subsystem to update the appropriate operational data field. Control then transfers to block 1018, where the system 10 determines if the command issued failed. if the command did not fail, thus indicating that the primary host field was properly  
5 updated, control transfers to block 1020, where system 10 determines if this is the last data field for the primary host. If not, control returns to block 1014, to form a download loop to recursively process all data fields for the primary host subsystem. Similarly, as seen in Figure 10, if the determination in block 1014 is negative, control likewise passes to block 1020 to check if additional fields remain to be processed. When block 1020 indicates that the last field  
10 has been processed, control transfers to block 1022, where the upload required flag for the given record is removed.

Upon removal of the upload required flag, control passes to block 1024 for processing of a secondary host subsystem. As seen in Figure 10, block 1024 is also reached if a command to the primary host subsystems fails in block 1018. In such case, since the primary host  
15 subsystem could not be completely updated, the "upload required" flag remains set, thus indicating to system 10 that the primary host is not synchronized with the internal database in system 10 and that uploading of this information should be re-tried at a later time. In addition, block 1024 can be reached from block 1012, if it is determined that the primary host subsystem is not online. Again, in such case, the "upload required" flag set in block 1010 will remain set  
20 and uploading of the primary host information can be re-tried at a later time.

In block 1024, system 10 first determined if a secondary host subsystem is present. If not, control passes to block 1036 and the process ends. If there is a secondary host subsystem present, control passes to block 1026, where the secondary host subsystem is selected. Control then passes to block 1028, where appropriate action is taken with respect to the secondary host  
25 subsystem depending on the field change. Specifically, depending on the field change, information will be inserted, modified, deleted or ignored in the secondary host subsystem.

Control then transfers to block 1030, where an appropriately formatted command is issued to the secondary host subsystem. In block 1032, the system 10 determines if the command failed, similar to block 1018 with respect to the primary host subsystem. If not,  
30 control transfers to block 1036 and the process ends. Of course, although not shown in Figure 10, a similar recursive loop like the type used in connection with the updating of the primary host subsystem could be employed with respect to the secondary host subsystem if necessary.

If the command failed, control transfers to block 1034, where the values of the internal database in system 10 are reset to the pre-edit settings. Thereafter, control transfers to block 1036, where the system records the command failure in a log file, notifies servers of the error, and reports the error to a trace mode routine. The process then ends at block 1036.

5 As described above, the present invention provides a system and method that reduces the time, effort and cost associated with the installation and maintenance of a telecommunications system. More interrelationships between data and more changes of cascaded events as a result of interlinked data are anticipated. Cascade of programming as a result of interrelationships of data represents one of the key contributing novelties to the time and cost saving elements of the present invention. Real-time or near real-time communications is also novel as it applies to two (2) or more managed devices. Project management, data, cable records, trouble tickets, etc. also important as interrelationships are important here as well.

15 As can be seen from the foregoing, a telecommunications installation and management system and method formed in accordance with the present invention reduces the time, cost and effort required in managing, controlling, updating and monitoring a telecommunications device, such as a private branch exchange telephone switch, voice messaging system, call accounting system, central office telephone switch, router, bridge, hub, or any other associated peripheral telecommunications equipment. A plurality of different types of telecommunications equipment provided by various different manufacturers using differing operating systems can be managed and controlled using the present invention through a single point of control for both system management and data entry. A local database within the telecommunications system provides for real-time or near real-time access and modification of programming information for the telecommunications equipment and further provides for redundancy in the event that the telecommunications equipment should fail.

25 Of course, those of skill in the art will recognize that additional features and capabilities could be included in the present system and still fall within the scope of the present invention. For example, the user interface could be modified to include additional graphical features consistent with standard graphical user interface applications. In addition, any number and variety of communications devices can be efficiently managed and controlled through a single central location in accordance with the present invention, thus reducing the costs and time involved in maintaining such systems.

I claim:

1. A telecommunications system installation and management apparatus for controlling the operation of at least two telecommunications devices that use different protocols for external communication with the installation and management apparatus, comprising:

5 a computer database system containing information used to control the operation of the telecommunications devices;

data input means for receiving commands from a user to control said computer database system and for receiving information from said user to be stored in said computer database system;

10 display means for displaying information stored in said computer database system to said user;

communication means connected with the at least two telecommunications devices for transferring data between the telecommunications devices and the telecommunications system installation and management apparatus; and

15 control means operatively connected with said computer database system, said data input means, said display means, and said communication means, said control means operating to retrieve information to be transferred to one of the at least two telecommunications devices from said computer database system, to generate a first telecommunications device control command by converting said information into a protocol suitable for use with said one of the  
20 at least two telecommunications devices, and for transferring said first telecommunications device control command to said one of the at least two telecommunications devices using said communication means.

2. The telecommunications system installation and management apparatus of claim 1 wherein said control means comprises a central processing unit of a personal computer and  
25 said computer database system comprises a database stored within a memory of said personal computer.

3. The telecommunications system installation and management apparatus of claim 2 wherein said data input means comprises a keyboard connected to said personal computer and said display means comprises a video display terminal connected with said personal computer.

4. The telecommunications system installation and management apparatus of claim 2 wherein said control means further comprises a computer program stored within said memory of said personal computer, said computer program operating to generate said first telecommunications device control command by converting said information into a protocol  
5 suitable for use with said one of the at least two telecommunications devices.

5. The telecommunications system installation and management apparatus of claim 1 wherein each of the at least two telecommunications devices is one of a private branch exchange system, a call accounting system, and a voice messaging system.

6. The telecommunications system installation and management apparatus of claim  
10 5 wherein each of the at least two telecommunications devices is a private branch exchange system.

7. The telecommunications system installation and management apparatus of claim 6 wherein each of the at least two private branch exchange systems are made by different manufacturers.

15 8. The telecommunications system installation and management apparatus of claim 1 wherein the at least two telecommunications devices include at least one private branch exchange system and at least one of a call accounting system and a voice messaging system.

9. The telecommunications system installation and management apparatus of claim 8 wherein said at least one private branch exchange system and said at least one of a call  
20 accounting system and a voice messaging system are made by different manufacturers.

10. The telecommunications system installation and management apparatus of claim 1 wherein each of the at least two telecommunications devices is one of a telecommunications switching system, a call accounting system, a voice messaging system, a router, a bridge, and a hub.

25 11. The telecommunications system installation and management apparatus of claim 1 wherein said communication means comprises a modem.

12. The telecommunications system installation and management apparatus of claim 1 wherein said communication means comprises one of a serial interface cable, wireless communication system, network interface card, FDDI, CDDI, asynchronous transfer mode adaptor and ISDN terminal adaptor.

5 13. The telecommunications system installation and management apparatus of claim 1 wherein said control means further operates to receive an acknowledgement from said one of the at least two telecommunications devices using said communication means, said acknowledgement confirming that said first telecommunications device control command was received and processed by said one of the at least two telecommunications devices.

10 14. The telecommunications system installation and management apparatus of claim 1 wherein said control means further operates to generate a second telecommunications device control command by converting said information into a protocol suitable for communication with another of said at least two telecommunications devices and to transfer said second telecommunications device control command to said another of said at least two  
15 telecommunications devices using said communication means.

15. The telecommunications system installation and management apparatus of claim 14 wherein said one of the at least two telecommunications devices is a private branch exchange telephone switch and said another of the at least two telecommunication devices is one of a call accounting system and voice messaging system.

20 16. The telecommunications system installation and management apparatus of claim 15 wherein said one of the at least two telecommunications devices and said another of the at least two telecommunication devices are made by different manufacturers.

25 17. The telecommunications system installation and management apparatus of claim 1 wherein said communication means is permanently connected with the at least two telecommunications devices.

18. A telecommunications system installation and management apparatus for controlling the operation of at least one telecommunications device operatively connected through a communications path with the apparatus, comprising:

a computer database including a plurality of data records containing program information  
5 used to control the operation of the at least one telecommunications device;

data input means for receiving information from said user to be stored in one of said plurality of data records in said computer database;

control means operatively connected with said computer database and said data input means, said control means operating to store said received information in said one of said  
10 plurality of records and to modify at least one other of said plurality of records in response to said received information.

19. The telecommunications system installation and management apparatus of claim 18 wherein said control means further operates to generate a first telecommunications device control command by converting said received information into a protocol suitable for use with  
15 said at least one telecommunications device, and for transferring said first telecommunications device control command to said at least one telecommunications device using the communication path.

20. The telecommunications system installation and management apparatus of claim 19 wherein said control means further operates to access said at least one other of said plurality  
20 of records to retrieve modified information therefrom, to generate a second telecommunications device control command by converting said modified information into a protocol suitable for use with said at least one telecommunications device, and for transferring said second telecommunications device control command to said at least one telecommunications device using the communication path.

25 21. The telecommunications system installation and management apparatus of claim 20 wherein said at least one telecommunications device comprises a PBX telephone switch and a call accounting system, and said first telecommunications device control command is transferred to said PBX telephone switch and said second telecommunications device control command is transferred to said call accounting system.

22. The telecommunications system installation and management apparatus of claim 20 wherein said at least one telecommunications device comprises a PBX telephone switch and a voice messaging system, and said first telecommunications device control command is transferred to said PBX telephone switch and said second telecommunications device control command is transferred to said call accounting system.

23. A telecommunications system installation and management apparatus for controlling the operation of at least two telecommunications devices operatively connected through a communications path with the apparatus, comprising:

a computer database including a plurality of data records containing program information used to control the operation of the at least two telecommunications devices; and

control means operatively connected with said computer database, said control means operating to access said computer database to retrieve said program information and further operating to

(a) format said program information into first formatted program information suitable for a first one of said at least two telecommunications devices, to generate a first telecommunications device control command by converting said first formatted program information into a protocol suitable for use with said first one of said at least two telecommunications devices, and to transfer said first telecommunications device control command to said first one of said at least two telecommunications devices, using the communication path; and

(b) format said program information into second formatted program information suitable for a second one of said at least two telecommunications devices, to generate a second telecommunications device control command by converting said second formatted program information into a protocol suitable for use with said second one of said at least two telecommunications devices, and to transfer said second telecommunications device control command to said second one of said at least two telecommunications devices, using the communication path.

24. The telecommunications system installation and management apparatus of claim 23 wherein said first one of said at least two telecommunications devices is a PBX telephone



switch and said second one of said at least two telecommunication devices is a call accounting system.

25. The telecommunications system installation and management apparatus of claim 24 wherein said program information is one of a user name and an extension number.

5 26. The telecommunications system installation and management apparatus of claim 23 wherein said first one of said at least two telecommunications devices is a PBX telephone switch and said second one of said at least two telecommunication devices is a voice messaging system.

10 27. The telecommunications system installation and management apparatus of claim 26 wherein said program information is one of a user name and an extension number.

28. A method of replacing an installed telecommunications device with a replacement telecommunications device comprising the steps of:

15 accessing a memory containing configuration information in the installed telecommunications device through a communications interface connected between the installed telecommunications device and a maintenance computer system;

transferring said configuration information from said memory in said installed telecommunications device through said communications interface to said maintenance computer system and storing said configuration information in a memory in said maintenance computer system;

20 replacing said installed telecommunications device with the replacement telecommunications device; and

transferring said configuration information stored in said memory in said maintenance computer system to said replacement telecommunications device using said communications interface.

25 29. The method of claim 28 further comprising the step of translating said configuration information received from said installed telecommunications device into a format compatible with said replacement telecommunications device before said configuration information is transferred to said replacement telecommunications device.

30. The method of claim 29 wherein said installed telecommunications device and said replacement telecommunications device are made by different manufacturers.

31. The method of claim 28 wherein said installed telecommunications device and said replacement telecommunications device comprise private branch exchange telephone  
5 switches.

32. The method of claim 28 wherein said installed telecommunications device and said replacement telecommunications device comprise call accounting systems.

33. The method of claim 28 wherein said installed telecommunications device and said replacement telecommunications device comprise voice messaging systems.

10 34. The method of claim 14 wherein said configuration information comprises information designating features to be provided to a telephone station, trunks, peripherals, or other services connected with said installed private branch exchange system.

35. A computer implemented system for controlling the operation of a telecommunications system including at least two telecommunications devices including at least  
15 one of a private branch exchange telephone switch, a call accounting system and a voice messaging system, comprising a computer readable medium encoded with a computer program and a database structure, said database structure containing information for controlling the operation of said at least two telecommunications devices and said computer program containing  
20 instructions that cause a computer system to retrieve information from said database structure and to process said information into device control commands suitable for transmission said at least two telecommunications devices.

36. The computer implemented system of claim 35 wherein said device control commands suitable for transmission to said at least two telecommunications devices have different protocol formats.

25 37. The computer implemented system of claim 35 wherein said at least two telecommunications devices have different internal operating systems.

38. The computer implemented system of claim 35 wherein said database structure contains a plurality of records, each of said records containing information used to control the operation of said at least two telecommunications devices.

5 39. The computer implemented system of claim 38 wherein said plurality of records contains a plurality of fields, and information contained in at least one of said fields is processed by the system to generate (1) a first command having a first format suitable for transmission to one of said at least two telecommunications devices and (2) a second command having a second format suitable for transmission to the other of said at least two telecommunications devices.

1/8

FIG. 1

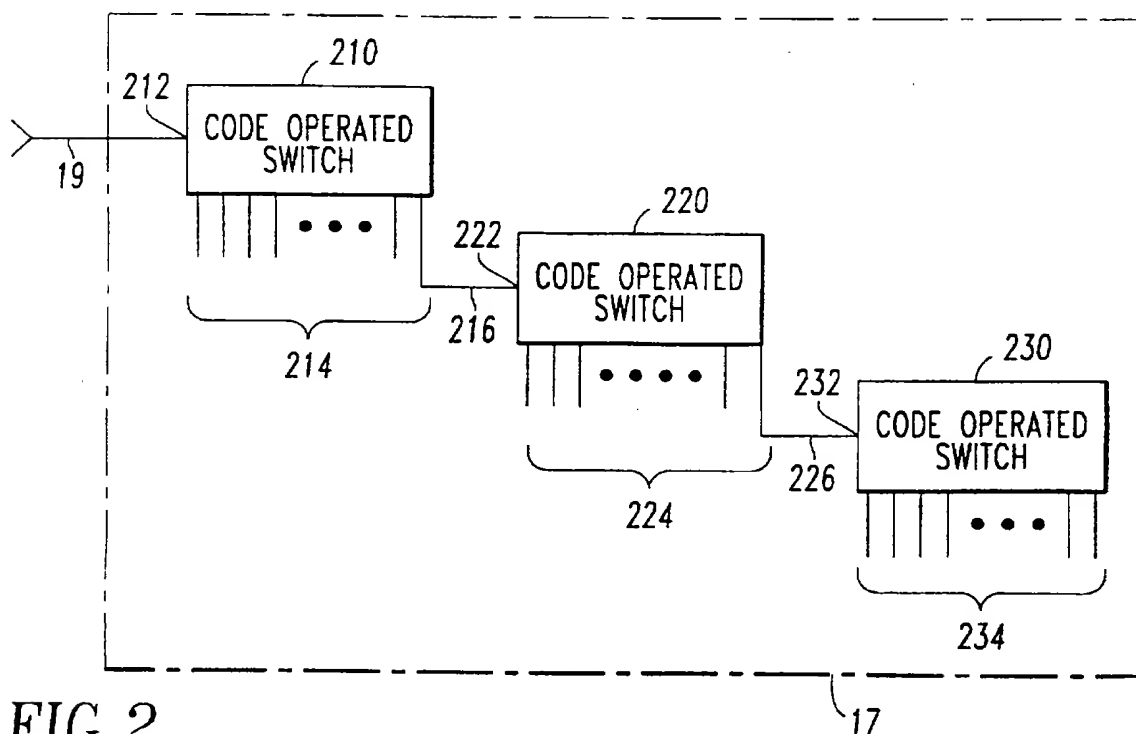
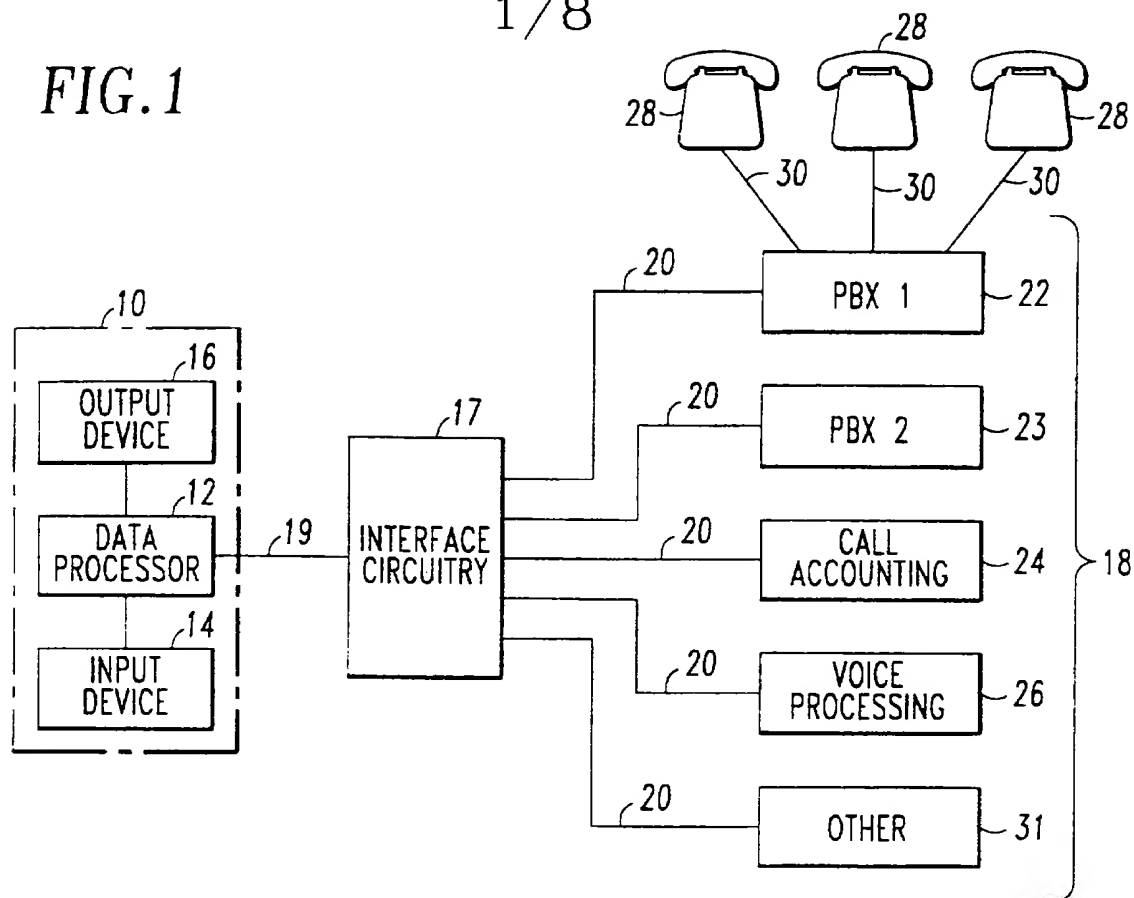


FIG. 2

SUBSTITUTE SHEET (RULE 26)

2/8

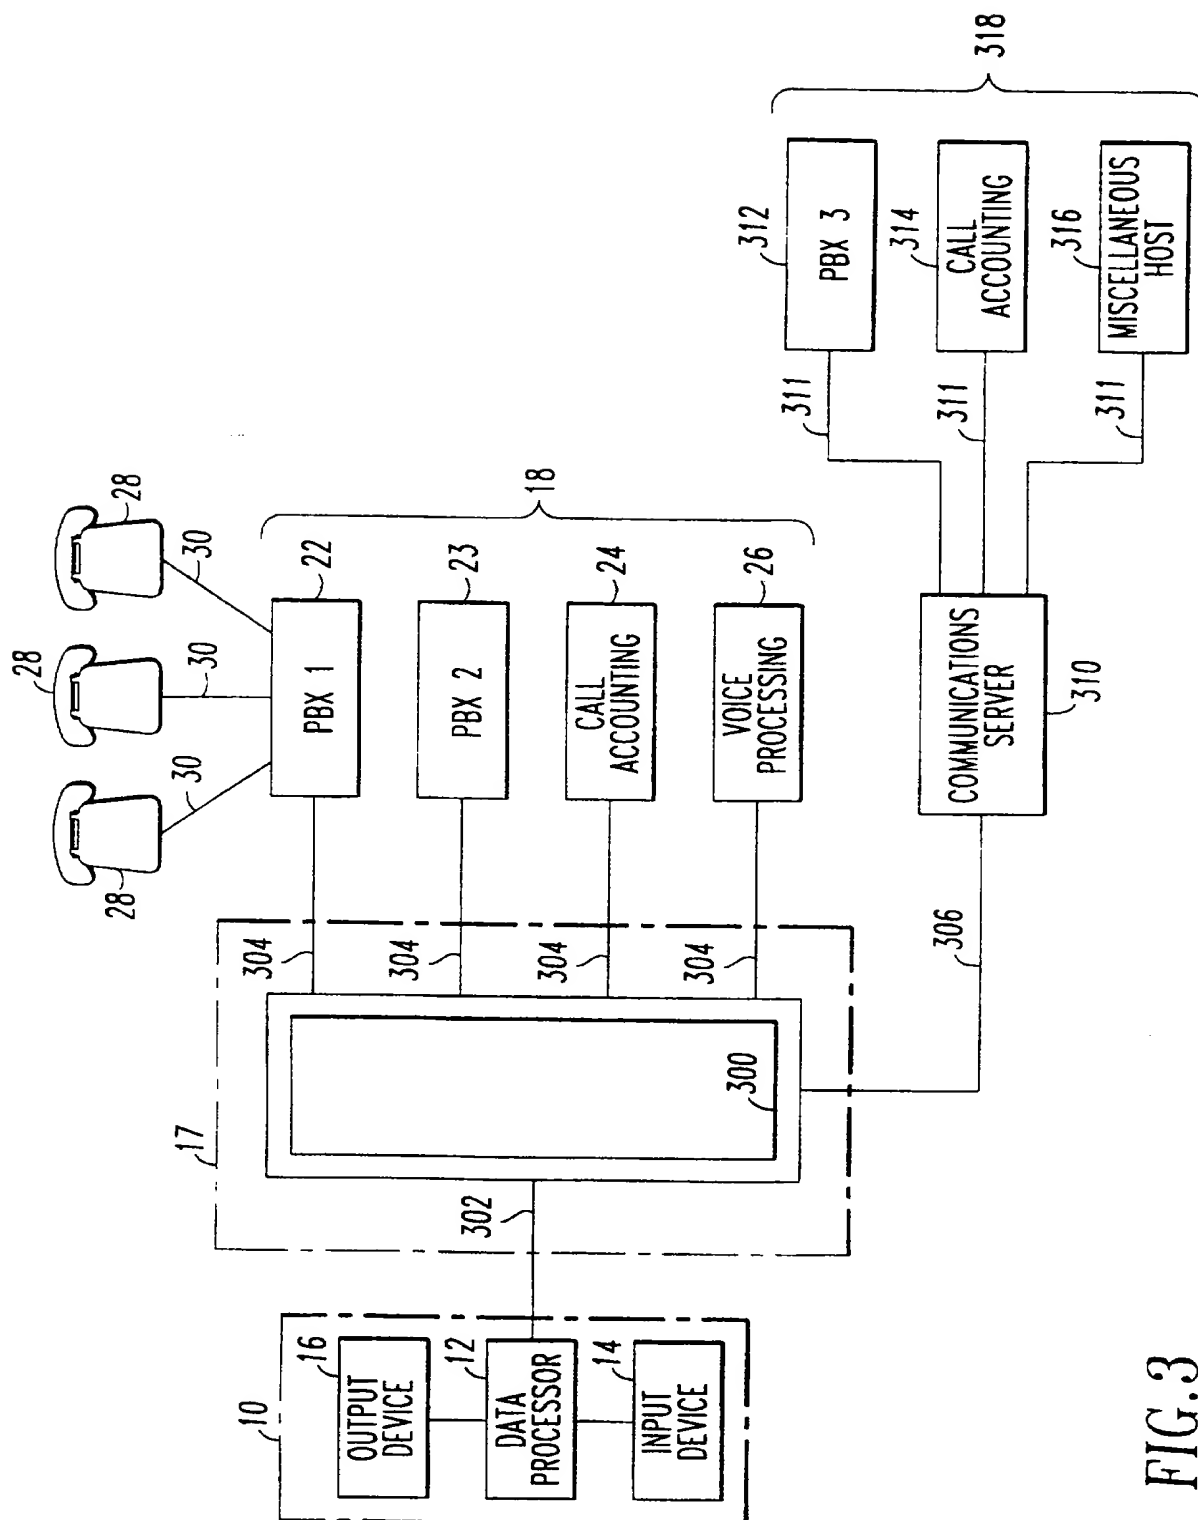


FIG.3

SUBSTITUTE SHEET (RULE 26)

3/8

FIG.4

FORTRAN TELEPHONE COMMUNICATIONS SYSTEMS SITE MANAGEMENT MAIN MENU	
402— <b>EXTENSION SEARCH</b>	}
404—LAST NAME SEARCH	
406—EQUIPMENT SEARCH	
408—LOCATION SEARCH	
410—CABLE SEARCH	
412—OTHER SEARCHES	400
414—UTILITIES	
416—ASSIGN EXTENSION NUMBER	
418—CHANGE EXTENSION NUMBER	
420—DELETE EXTENSION NUMBER	
422—WORK ORDER LOG	
424—SYSTEM CONNECTIONS	
426—TRUNK INFORMATION	
428—VIEW/PRINT REPORTS	
430—QUIT	

UTILITIES
602— <b>BACKUP DATABASE</b>
604—REINDEX DATABASE
606—LABELS
608—PACK DATABASE
610—PHONE COUNT
612—CHECK AND LOAD DATABASE
614—VACANT NUMBERS
616—CREATE MICROCALL SDF FILE
618—EXPORT DIAL-BY-NAME
620—SITE PROFILE
622—ADD NEW STATION RECORD
624—REMOVE STATION RECORD
626—PRINT STATION RECORDS
QUIT

FIG.6

SUBSTITUTE SHEET (RULE 26)

4/8

500

EXTENSION: 1221		LOCATION: OPS-11	EQUIPMENT: 00001020	NUM	11:16:28 am
NAME: SUGAR, DAVID		DEPARTMENT: OPERATIONS			
PUBLISHED: (703) 492-1221		TOLL CLASS: D	COS: 1	PHONETYPE: D124DS	
SERIAL#:		PICKUP GROUP: 1255	MAILBOX: 1221	ASSIST: 1268	
BL 5420	NA 5420	AC	DND 5420	INTERCOM	
CABLE NO: 106	HOUSE PAIR		MDF PAIR		
DATA EXT					

[UPLOAD REQUIRED]		502	
F1	F2	F3	F4
SCAN	EDIT	WORK ORDERS	UPLOAD EXT
F5	F6	F7	F8
DELETE RECORD	FILTER BUILDING	PRINT	TTY
F9	F10	504	
CMD			

FIG.5

SUBSTITUTE SHEET (RULE 26)

5/8

FIG.7

WORK ORDER LOG
702— <b>OUTPUT OPEN WORK ORDER SUMMARY</b>
704—OUTPUT OPEN WORK ORDER TICKETS
706—OUTPUT ALL WORK ORDER TICKETS
708—UPLOAD REQUIRED FLAGGED RECORDS
710—REPAIR CODE SUMMARY REPORT
712—SEARCH BY ORDER NUMBER
714—SERVICE DISPATCH ORDER SHEETS
QUIT

CONNECTIONS
802— <b>PBX COMMAND LANGUAGE</b>
804—PBX TTY SESSION
806—VOICEMAIL MENU SESSION
808—UPLOAD DATABASE TO PBX
810—DOWNLOAD PBX TO DATABASE (MULTIPBX OPTION)
814—ASSIGN UNDEFINED EQUIPMENT
816—FEATURE ACCESS NUMBER PLAN
818—DOWNLOAD VOICE MAIL DATABASE
820—PBX PACKAGE DATABASE
822—SYNCHRONIZE AUTH CODES
824—TCSI TELNET SESSION
QUIT

FIG.8



6/8

FIG. 9



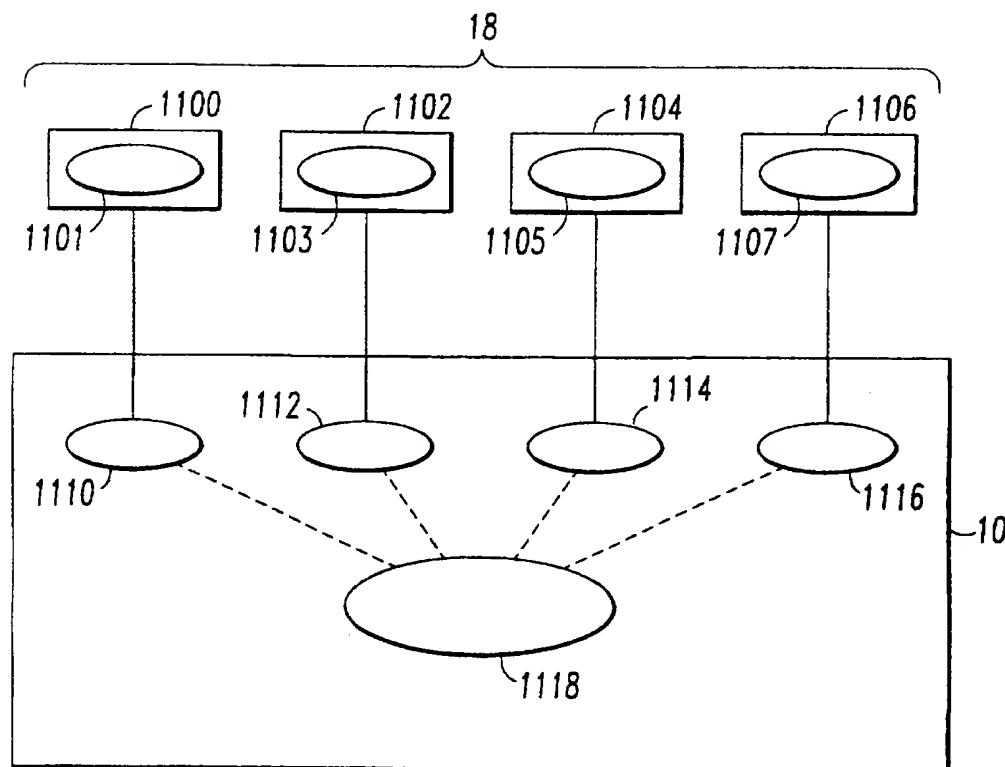


FIG. 11

7/8


FIG. 10A

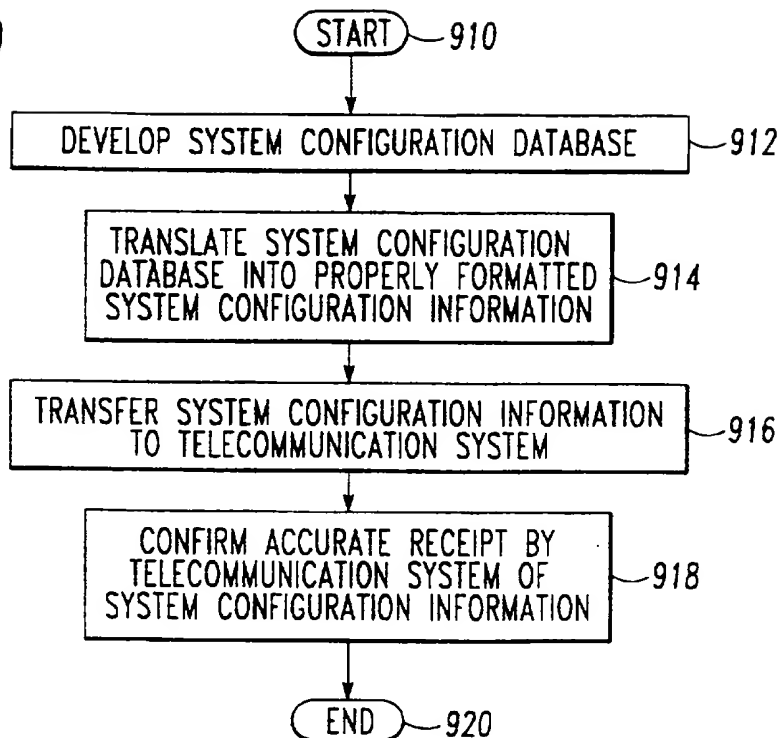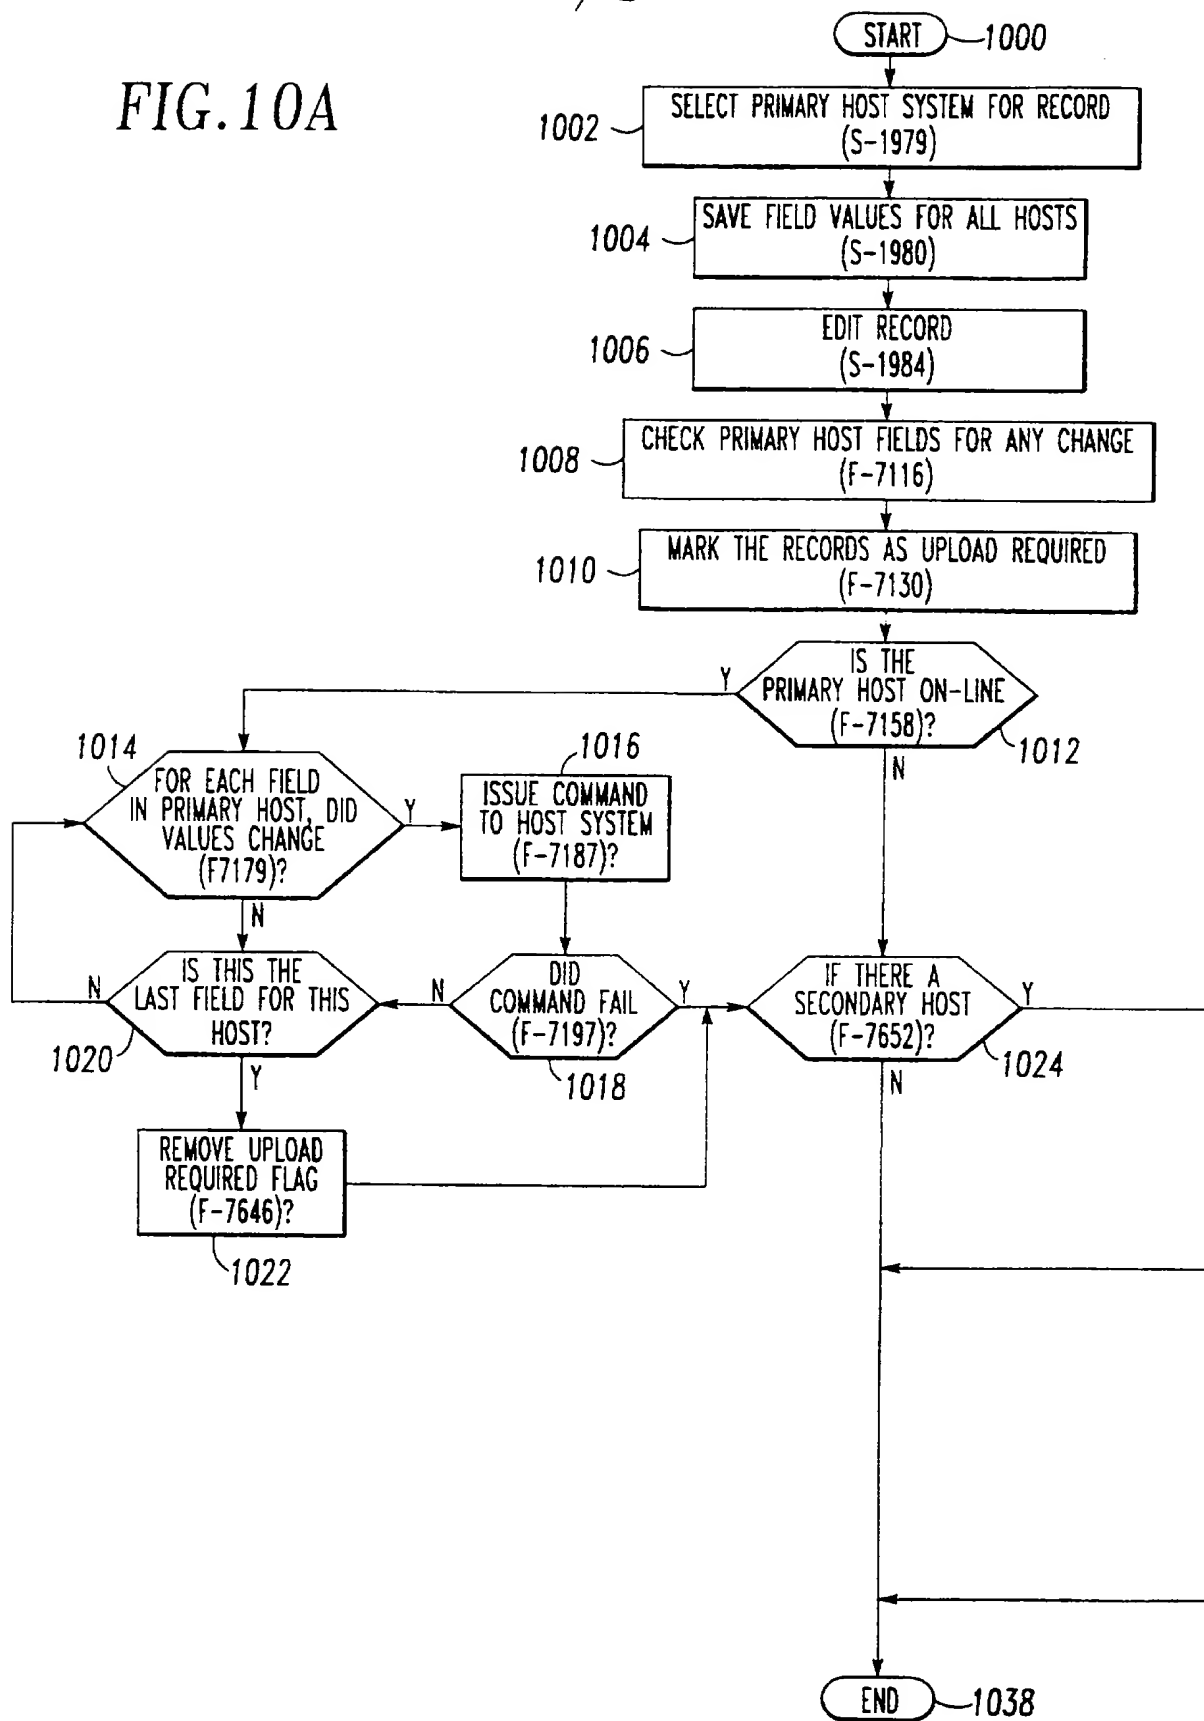

SUBSTITUTE SHEET (RULE 26)

8/8


FIG. 10B

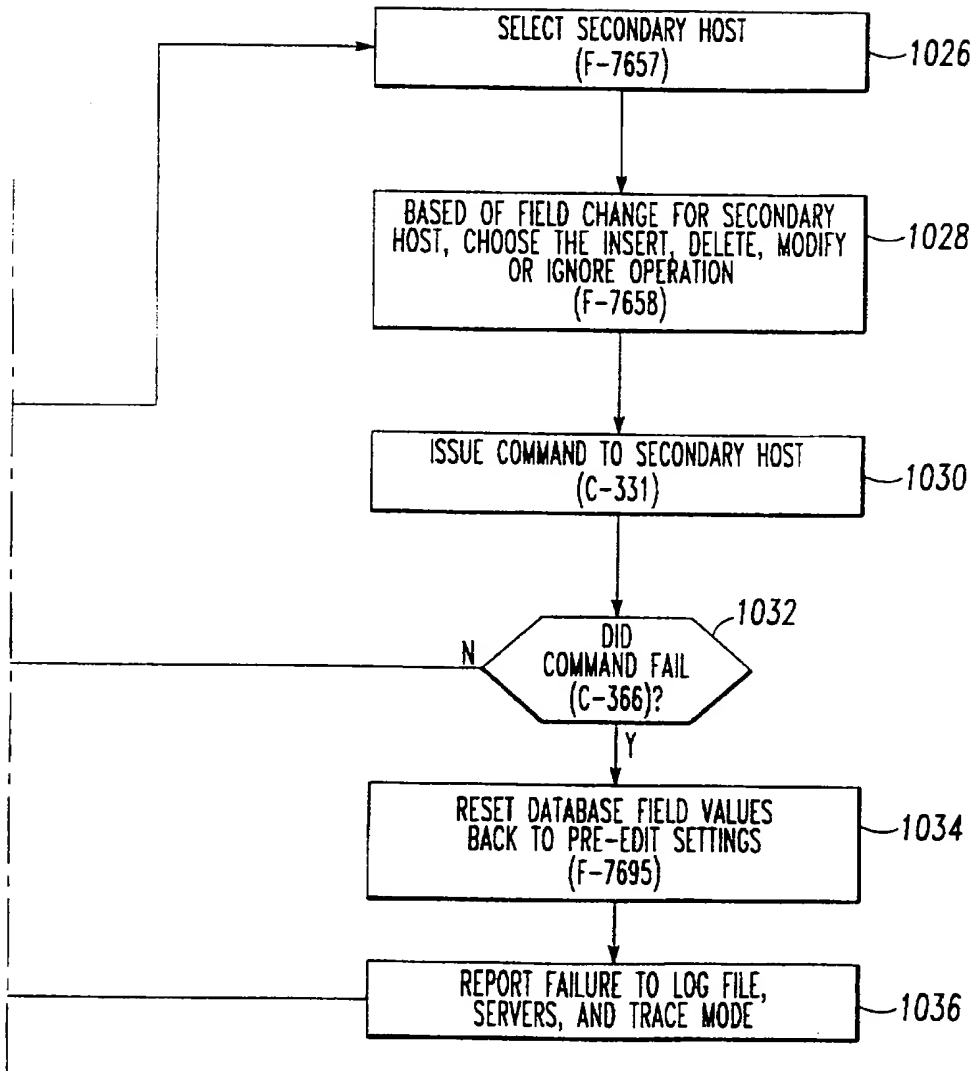

SUBSTITUTE SHEET (RULE 26)

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US97/13454

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC(6) : H04M 3/22, 3/50, 7/14 US CL : 379/14, 89, 207, 225, 279 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) U.S. : 379/14, 67, 88, 89, 112, 114, 115, 201, 207, 221, 225, 279 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,782,517 A (BRENARDIS et al) 01 November 1988, column 3, lines 7-22; column 4, lines 8-22; column 4, line 62 to column 5, line 13.	1-27 and 34-39
Y	US 5,488,569 A (KAPLAN et al) 30 January 1996, Figure 1; column 1, lines 24-30; column 3, line 48 to column 4, line 63.	1-27 and 34-39
Y	US 5,276,727 A (KIM et al) 04 January 1994, Figure 2; column 2, lines 22-38 and column 9, lines 49-61.	11
A	US 4,811,388 A (WESTERHOF et al) 07 March 1989	1-39
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
*A*	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*B*	earlier document published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*L*	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*O*	document referring to an oral disclosure, use, exhibition or other means	*Z* document member of the same patent family
*P*	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search 25 SEPTEMBER 1997		Date of mailing of the international search report 24 DEC 1997
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer  THOMAS W. BROWN Telephone No. (703) 305-4733

Form PCT/ISA/210 (second sheet)(July 1992)\*

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US97/13454

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,049,873 A (ROBINS et al) 17 September 1991	1-39
A	US 5,533,109 A (BAKER) 02 July 1996	1-39
A	US 5,537,466 A (TAYLOR et al) 16 July 1996	1-39
A, P	US 5,577,041 A (SHARMA et al) 19 November 1996	1-39
A, P	US 5,621,727 A (VAUDREUIL) 15 April 1997	1-39